


36 1/2" Steel Tired Wheel. Common Standard.

All Common Standard Passenger Train Cars are equipped with M.C.B. 40 Ton Axles, Wheels furnished for new Equipment must have Axle bore 6 1/4" rough bore.

Cast Iron Wheel Center
Open hearth Steel Tires
as per Specification C.S. 15
Furnished by Manufacturer See
Schedule P. 20.

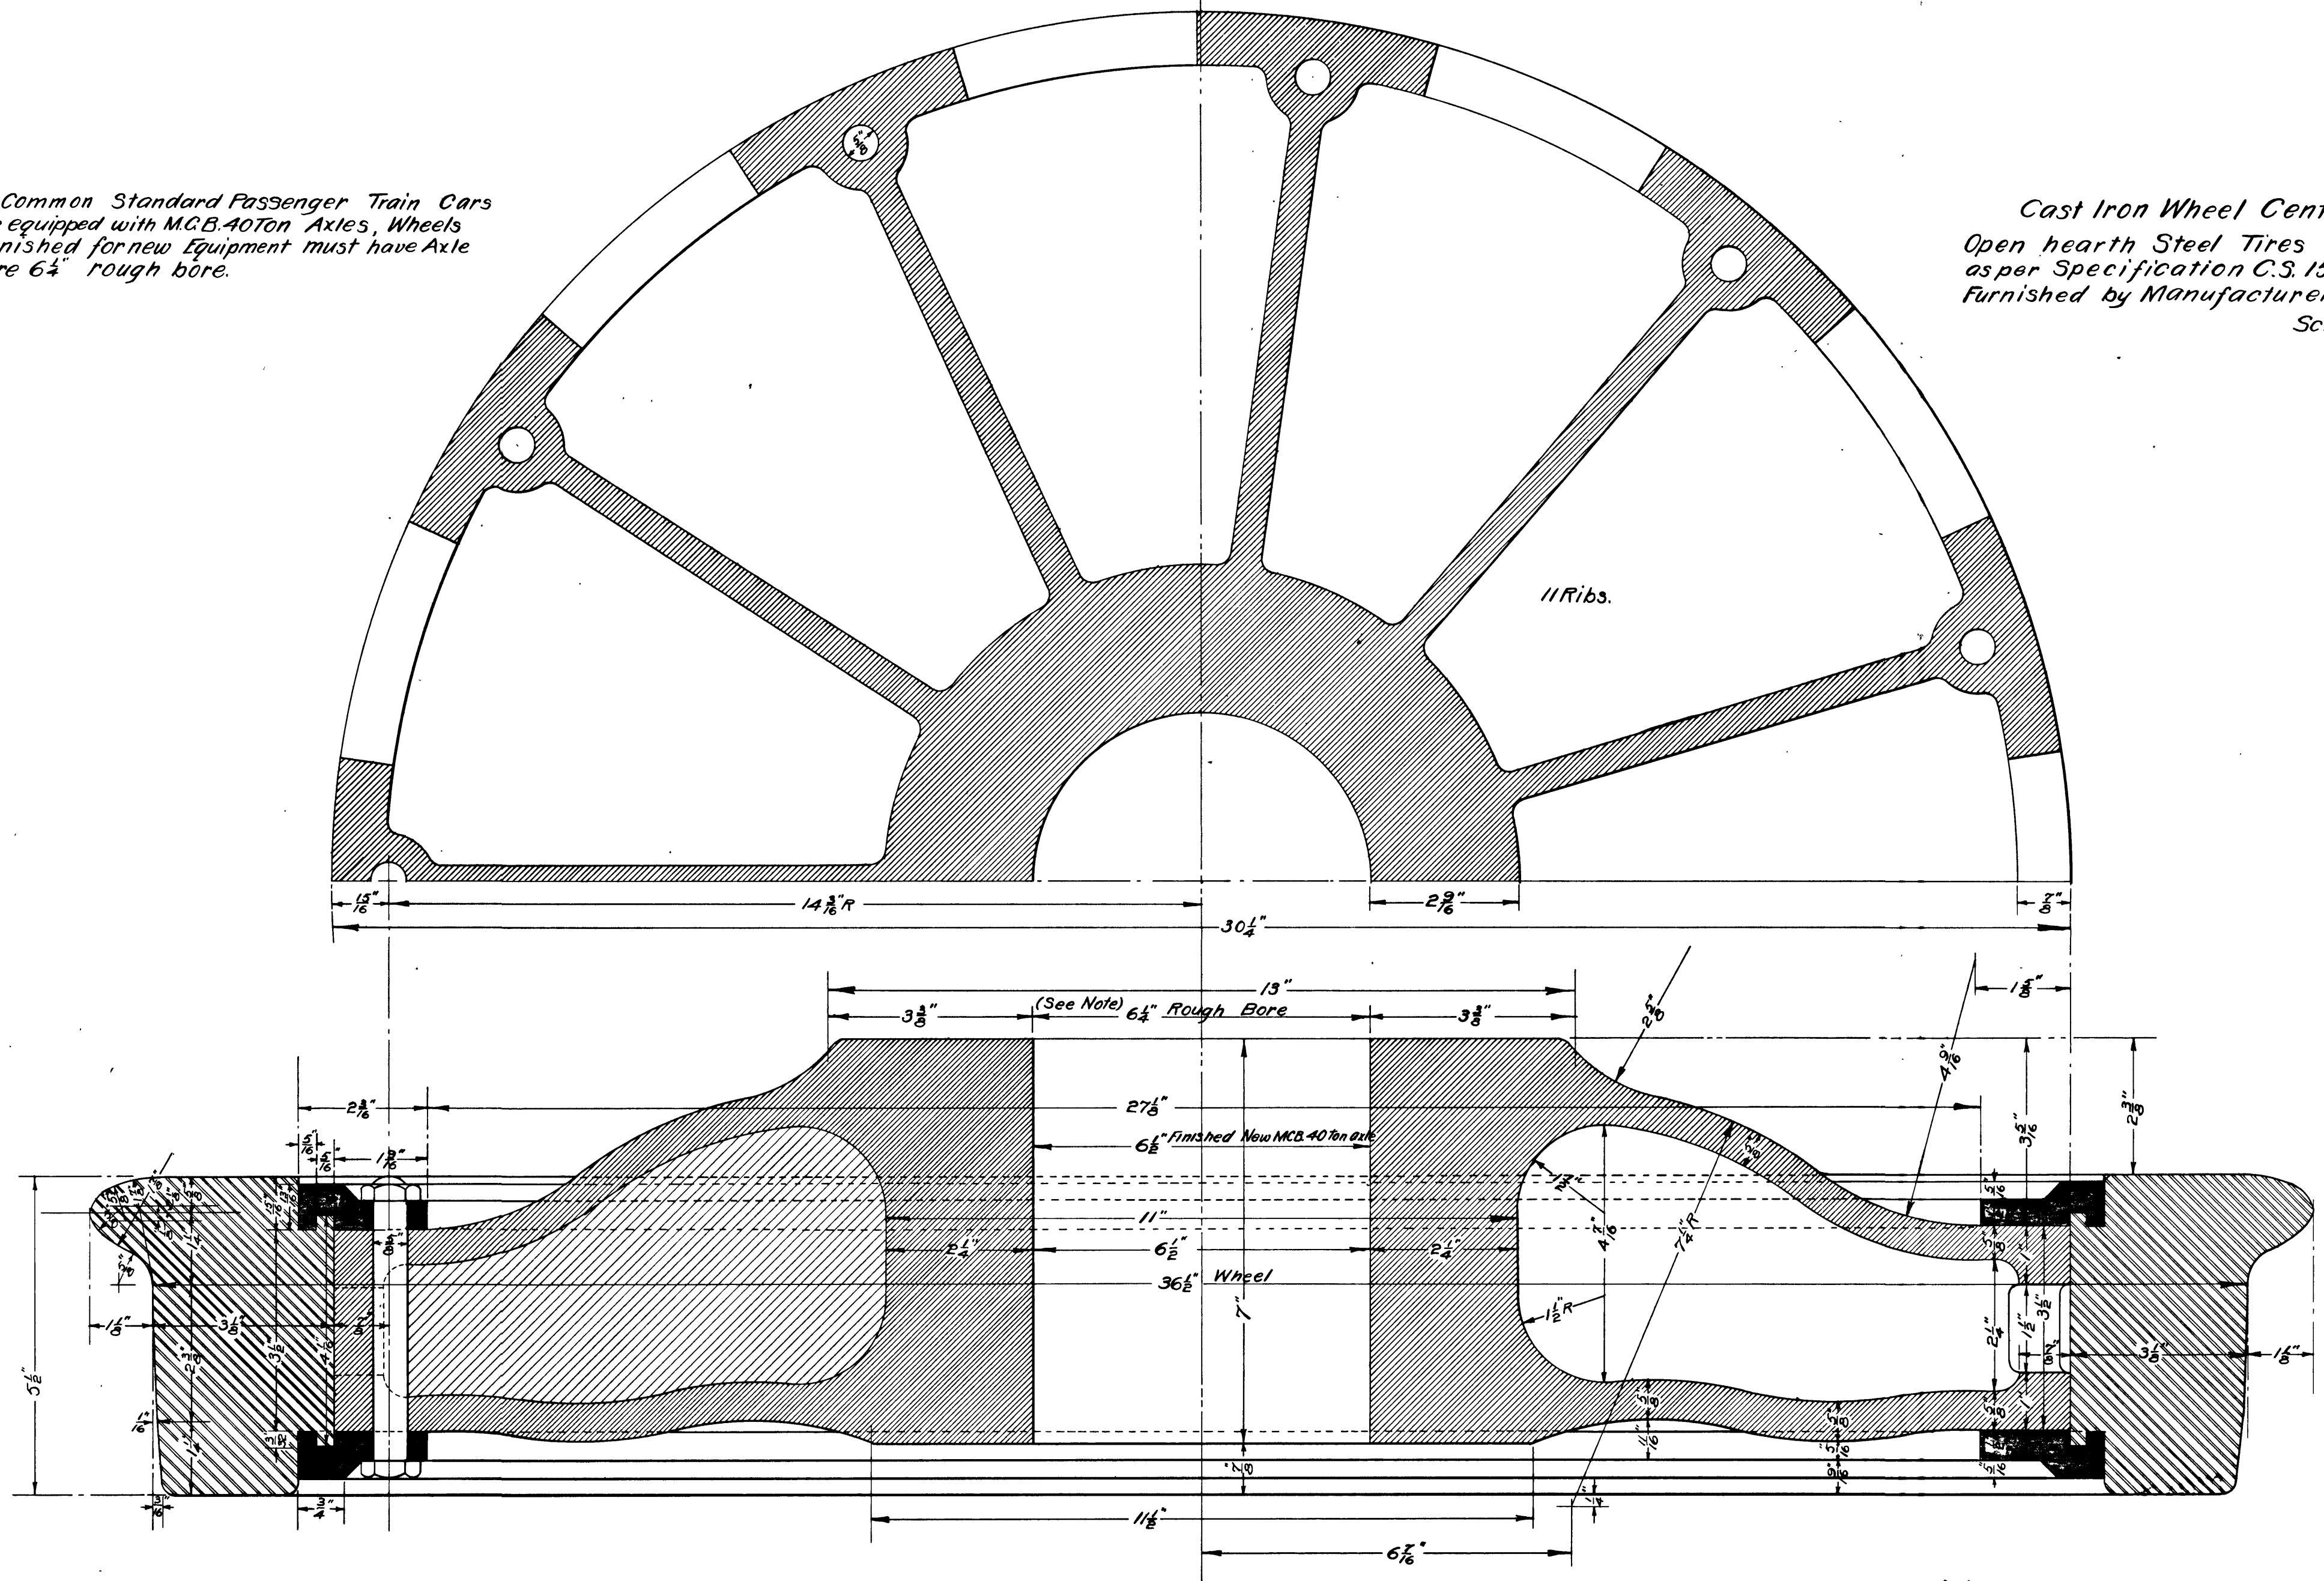

Note:— Unless specified as Common Standard, all wheels are to be furnished for M.C.B. 30 Ton Axles, 5 1/4" Rough Bore.

	Finished	Rough
Tires	527 LBS.	600 LBS.
Centers	485 "	540 "
Rings	60 "	
Bolts & Nuts	10 "	
Total	1082 "	

Size of bolts changed to 3/4" nut placed outside and lead & nut strengthened



THE OREGON RAILROAD & NAVIGATION CO.
MOTIVE POWER & CAR DEPARTMENT.

APPROVED:—
Supt. MOTIVE POWER.

ALBINA SHOPS — PORTLAND, ORE.
JUNE, 16TH, 1905.

D. 2687.