

g, and report such case should also see that are used, the handle bottom of grade is alert at all times, in case of any emerge necessitate the pro

OREGON SHORT LINE RAILROAD COMPANY.

EMPLOYEES' TIME TABLE

No. 2.

TO TAKE EFFECT

Sunday, July 25th, 1897,

12.05 A. M. "MOUNTAIN TIME."
["Pacific Time" Used on Boise Branch.]

Provided by
www.uphs.org



THIS TIME TABLE is for the use and guidance of Employees only, and is not intended for the information of the public, or as an advertisement of the time of any train. The Company reserves the right to vary from it at pleasure.

W. H. BANCROFT,
Vice-President & General Manager,
SALT LAKE, UTAH.

E. E. CALVIN,
General Superintendent,
SALT LAKE, UTAH.

H. E. VAN HOUSEN,
Superintendent Idaho Division,
POCATELLO, IDAHO.

C. A. BOIES,
Superintendent Montana Division,
POCATELLO, IDAHO.

J. H. YOUNG,
Superintendent Utah Division,
SALT LAKE, UTAH.

SPECIAL RULES.

All Freight Trains may carry passengers with tickets or other proper transportation, subject to Rules 218 and 243. In approaching switches or passing through yards, Passenger Trains will reduce speed to 20 miles per hour, and Freight Trains and Light Engines will reduce speed to 15 miles per hour.

RULES 36 AND 37.—Referring to Rules 36 and 37. The day signals will be carried during the night in addition to regular night signals. Trains must not exceed eight miles per hour within the limits of Salt Lake City.

REGISTERING STATIONS.

GRANGER, FOSSIL, MONTPELIER, McCAMMON, POCATELLO,	SHOSHONE, KETCHUM, GLENN'S FERRY, NAMPA, BOISE,	HUNTINGTON, OGDEN, CACHE JUNCTION, PRESTON, DUBOIS,	MONIDA, LIMA, DILLON, SILVER BOW, SALT LAKE,	GARFIELD BEACH, TERMINUS, LEHI JUNCTION, SILVER CITY, EUREKA.	PROVO, NEPHI, JUAB, MILFORD, FRISCO.
---------------------------------------------------------------	-------------------------------------------------------------	-----------------------------------------------------------------	----------------------------------------------------------	---------------------------------------------------------------------------	--------------------------------------------------

W. A. WHITNEY,
Chief Dispatcher, Idaho Division,
Pocatello, Idaho.

E. C. MANSON,
Chief Dispatcher, Montana Division,
Pocatello, Idaho.

W. F. LARIMER,
Chief Dispatcher, Utah Division,
Salt Lake, Utah.

LIST OF SURGEONS.

SURGEON.	PLACE.	OFFICE.	RESIDENCE.	DISTRICT.
Dr. S. H. Pinkerton, Chief Surgeon	Salt Lake City	McCormick Building		All.
Dr. U. Worthington	Salt Lake City	McCormick Building	Same	Salt Lake to Ogden, Juab and Terminus.
Dr. J. F. Critchlow	Salt Lake City	Summit Block	440 South Seventh East	" "
Dr. G. B. Pfoutz, Oculist	Salt Lake City	Office, Mercantile Block	Same	All Divisions.
Dr. E. S. Joyce	Salt Lake City	First National Bank Building	327 23rd St.	Salt Lake to McCammon.
Dr. J. C. Carnahan (Consulting Surgeon)	Ogden			Ogden to Pocatello and Cache Valley Branch
Dr. O. C. Ormsby	Logan	Main Street		Poca. to Ogden, Lima, Nephi & Glenn's Ferry
Dr. O. B. Steeley	Pocatello	Center Street		Camas to Dillon.
Dr. L. C. Ford	Lima	Main St.	Center Street	Lima to Butte.
Dr. J. C. Johnston	Butte		Main St.	Granger to Fossil.
Dr. J. W. Hawk	Green River			Granger to Pocatello.
Dr. E. F. Guyon	Montpelier			Pocatello to G. Ferry and Wood River Branch
Dr. W. H. Baugh	Shoshone	Main St.		Shoshone to Caldwell.
Dr. W. F. Smith	Mt. Home		Main Street	Glenn's Ferry to Huntington.
Dr. E. E. Maxey	Caldwell			Mountain Home to Payette.
Dr. C. M. Scott	Payette			Nampa to Huntington.
Dr. A. A. Leonard	Huntington			Boise Branch.
Dr. H. G. Collister	Boise	611 Main St.	1137 7th St.	Wood River Branch.
Dr. N. J. Brown	Hailey	Bullion St.	Bullion Street	Salt Lake to Nephi.
Dr. W. R. Pike	Provo	J and Third St.	Same	Provo to Frisco.
Dr. E. E. Wilcox	Nephi	Nephi	Same	Lehi Junction to Eureka.
Dr. G. J. Field	Eureka			

At or near dividing line of districts, Local Surgeons may be summoned from either direction. Division Surgeons may be called as consulting Surgeons in serious cases, when necessary. Licensed Watch Maker, J. H. Leyson Co., Salt Lake City.

Idaho Division--FIRST DISTRICT--Granger and Montpelier.

Length of Sidings in feet, and location of Seats, Water, Fuel and Turning Stone.	WESTWARD				Time Table No. 2. July 25, 1897.	EASTWARD				
	Second Class		First Class Fast Mail	Distances from Granger		Distances from Huntington	Second Class			Distances from Granger
	23	21					2	22	24	
	Freight	Business & Organ Time Freight	Fast Mail				Fast Mail	Time Freight	Freight	
Leave Daily	Leave Daily	Leave Daily	Arrive Daily		Arrive Daily		Arrive Daily			
7,887	TW	5.10PM	1.30AM	9.15PM	N.....GRANGER.....Gn	541.3	1.00PM	4.35AM	10.10PM	
1,984		5.40	2.00	9.27MOXA.....7.8	588.7	f 12.42	4.07	9.27	
2,028	W	6.10	2.30	f 9.39NUTRIA.....9.1	525.9	f 12.22PM	3.35	8.43	
1,965		6.45	3.00	9.55	D.....OPAL.....Na	516.8	s 11.59AM	3.00	8.00	
2,011	W	7.20	3.35	10.09WATERFALL.....2.4	507.8	f 11.38	2.20	7.20	
6,527	Y			QUARRY SPUR.....2.6	505.4				
6,118		7.40	3.52	s 10.21	N.....DIAMONDVILLE.....Da	502.8	s 11.26	1.54	6.55	
5,892	Y	7.52	4.05	f 10.30HAM'S FORK.....1.4	499.6	s 11.15	1.40	6.40	
8,096 3,455	WYC	8.20	4.32	s 10.47MOYER.....6.2	498.2				
1,751	W	8.45	4.55	10.58	N.....FOSSIL.....F1	492.0	s 10.52	1.03	6.00	
8,095		9.10	5.20	11.11NUGGET.....7.0	485.3	f 10.36	12.33	5.30	
2,977		9.38	5.50	11.25SAGE.....8.4	478.3	f 10.20	12.01AM	5.00	
2,289	W	10.20	6.30	s 11.46PMBECKWITH.....12.0	469.9	f 10.00	11.25PM	4.20	
1,810		10.50	7.00	12.02AM	N.....COKEVILLE.....Kv	457.9	f 9.30 9.10	10.20	3.30	
2,527	W	11.10	7.20	12.13BORDER.....5.7	449.3	f 8.47	9.47	2.55	
3,344		11.47PM	8.07	12.31PEGRAM.....10.3	443.5	f 8.33	9.25	2.30	
17,707	TYCW	12.15AM	8.45AM	12.45AMDINGLE.....7.0	432.2	f 8.07	8.45	1.45	
		Arrive Daily (7.05)	Arrive Daily (7.15)	Arrive Daily (8.30)	N.....MONTPELIER.....M	426.2	7.50AM	8.15PM	1.15PM	

West-Bound Trains will have Absolute Right to the track over East-Bound trains of the same or inferior class.—See Rule 84.
 Diamondville cannot be used to meet trains.
 Trains must not exceed schedule time between Ham's Fork and Fossil. No Train or Engine will exceed ten (10) miles per hour passing through Ham's Fork Tunnel.

Idaho Division--SECOND DISTRICT--Montpelier and Pocatello.

Length of Sidings in feet, and location of Seats, Water, Fuel and Turning Stone.	WESTWARD						Time Table No. 2. July 25, 1897.	EASTWARD						
	Second Class			First Class Mail and Express	Distances from Granger	First Class		Second Class						
	27	19	23			7		1	2	8	22	24	20	25
	Freight	Freight	Freight	Mail and Express		Fast Mail		Fast Mail	Fast Mail	Time Freight	Freight	Freight	Freight	
Leave Daily	Leave Daily except Sunday	Leave Daily	Leave Daily	Leave Daily		Arrive Daily	Arrive Daily	Arrive Daily	Arrive Daily	Arrive Daily except Sunday	Arrive Daily			
17,707	TYCW			1.00AM	9.30AM	115.1	N.....MONTPELIER.....M	426.2	7.40AM	7.30PM	12.20PM			
1,788				1.25	9.53	121.4PESCADERO.....4.0	419.9	f 7.24	7.02	11.50AM			
814						125.4WOOLEY'S SPUR.....3.6	415.9						
1,908	W			1.50	10.20	129.0NOVENE.....7.1	412.8	f 7.05	6.28	11.15			
1,800				2.14	10.45	136.1MANSON.....3.9	406.2	f 6.49	6.00	10.45			
6,008	Y			2.26	11.00	140.0GRACE.....4.7	401.2	f 6.40	5.42	10.27			
1,908	W			2.40	11.15	144.7STOCK YARDS.....1.3	396.6	6.29	5.22	10.10			
3,387				2.47	11.21	146.0	N.....SODA SPRINGS.....Sd	395.3	s 6.24	5.15	10.02			
1,777				3.05	11.40AM	151.7CRATER.....10.1	389.6	f 6.10	4.50	9.40			
5,740	OWY			3.38	12.15PM	161.8	N.....BANCROFT.....Bn	379.5	s 5.45	4.05	8.55			
2,587				4.05	12.45	170.4PEBBLE.....7.0	370.9	f 5.26	3.25	8.20			
2,066	JW			4.26	1.10	177.4LAVA.....6.8	363.9	f 5.10	2.55	7.48			
1,851				4.53	1.32	184.3TOPAZ.....7.0	357.1	f 4.53	2.25	7.20			
7,257	YW	6.10PM	12.25PM	5.20	1.55	191.2	N.....McCAMMON.....Mc	350.1	s 4.36	3.45AM	1.55	6.50	7.20AM	1.00PM
1,828		6.25	12.44	5.36	2.12	195.7ONYX.....6.4	345.6	f 4.25	3.35	1.35	6.30	7.04	12.44
1,751	W	6.44	1.10	6.02	2.35	202.1INKOM.....5.9	339.2	f 4.08	3.19	1.10	6.02	6.43	12.20
1,778		7.02	1.35	6.24	2.54	208.0PORTNEUF.....6.4	333.3	f 3.55	3.06	12.50	5.35	6.24	12.04PM
76,325	OTYCW	7.20PM	2.00PM	6.45AM	3.15PM	214.4	N.....POCATELLO.....HCa	326.9	3.40AM	2.55AM	12.30PM	5.15AM	6.00AM	11.45AM

West-Bound Trains will have Absolute right to the track over East-Bound Trains of the same or inferior class.—See Rule 84.
 Second District Dispatcher will give all orders concerning movement of trains between McCammon and Pocatello.

Idaho Division—THIRD DISTRICT—Pocatello and Glenn's Ferry.

WESTWARD				EASTWARD			
Search of Station in Book, and Location of Road, Water, Fuel and Turning Stations.	Time Table No. 2. July 25, 1897.	Second Class			First Class		
		23	21	1	2	22	24
		Local Freight Leave Daily	Oregon Time Freight Leave Daily	Fast Mail Leave Daily	Fast Mail Arrive Daily	Time Freight Arrive Daily	Local Freight Arrive Daily
76,826 YOTCW		7.45 AM	8.15 PM	3.55 AM	2.25 AM	10.45 AM	3.30 AM
1,768		8.15	8.40	4.10	2.09	10.15	2.50
1,719 W		9.15	9.30	4.40	1.35	9.15	1.35
1,867		9.50	9.55	4.58	1.19	8.42	12.48
1,776 W		10.23	10.18	5.14	1.03	8.15	12.05 AM
1,808		11.30 AM	11.05 PM	5.43	1.03	7.15	11.05 PM
1,806 CW		12.35 PM	12.01 AM	6.15	1.03	6.15	9.53
1,796 W		1.30	1.00	6.40	1.03	5.20	8.53
1,809 W		2.15	1.40	6.58	1.03	4.45	8.10
1,868		2.45	2.10	7.10	1.03	4.15	7.40
28,194 OTYCW		3.23	2.50	7.28	1.03	3.38	7.00
1,909		3.50	3.15	7.40	1.03	3.15	6.35
1,900 W		4.10	3.40	7.48	1.03	2.53	6.15
1,901		4.40	4.20	8.01	1.03	2.18	5.40
2,019 W		5.10	4.50	8.13	1.03	1.50	5.10
1,928 Y		5.40	5.25	8.28	1.03	1.18	4.20
2,122 W		6.15 PM	6.00 AM	8.45 AM	1.03	12.45 AM	3.35 PM
804		Arrive Daily	Arrive Daily	Arrive Daily	Leave Daily	Leave Daily	Leave Daily
15,846 TCW		(10.30)	(9.45)	(4.50)	(5.20)	(10.00)	(11.55)

Idaho Division—BOISE BRANCH.

WESTWARD				EASTWARD			
Search of Station in Book, and Location of Road, Water, Fuel and Turning Stations.	Time Table No. 2. July 25, 1897.	First Class		Passenger		Distances from Nampa	
		35	33	34	36		
		Passenger Leave Daily	Passenger Leave Daily	Passenger Arrive Daily	Passenger Arrive Daily		
10,191 OTCW		5.05 PM	10.50 AM	10.30 AM	4.45 PM	0	
612						6.5	
668						10.2	
600		6.05 PM	11.50 AM			19.8	
5,122 TW		Arrive Daily	Arrive Daily				
		(1.00)	(1.00)				

West-Bound Trains will have Absolute Right to the track over East-Bound Trains of the same or inferior class.—See Rule 84.
Boise Branch Trains will use Pacific Time, which is one hour slower than Mountain Time.
Regular Trains will not exceed schedule time and Extras and Light Engines will not exceed 15 miles per hour between Glenn's Ferry and Tieska.
Trains must not exceed a speed of twelve (12) miles per hour crossing Snake River bridge at American Falls.

Idaho Division—FOURTH DISTRICT—Glenn's Ferry and Huntington.

WESTWARD				EASTWARD			
Search of Station in Book, and Location of Road, Water, Fuel and Turning Stations.	Time Table No. 2. July 25, 1897.	Second Class		First Class		Distances from Huntington	
		23	21	1	2		
		Local Freight Leave Daily	Oregon Time Freight Leave Daily	Fast Mail Leave Daily	Fast Mail Arrive Daily		
15,846 OTW		7.15 PM	7.00 AM	9.05 AM	8.45 PM	374.4	
2,918		8.22	7.45	9.27	8.22	385.5	
5,618 Y		9.15	8.30	9.47	11.35 PM	394.0	
4,394 W		10.20	9.20	10.07	11.00	404.0	
1,981 W		11.10	10.25	10.25	12.35 PM	415.1	
1,998 W		11.55 PM	11.15 AM	10.42	9.45	425.3	
1,942		12.40 AM	12.05 PM	11.01	11.55 AM	437.1	
1,928		1.15	12.40	11.14	10.42	445.0	
1,962		1.35	12.58	11.21	9.50	449.2	
10,191 OTWC		2.15	1.40	11.40	8.25	459.0	
5,960 W		2.50	2.15	11.59 AM	7.50	468.0	
2,049		3.20	2.45	12.14 PM	7.20	474.8	
2,048		3.50	3.20	12.31	6.50	483.1	
890					6.50	488.2	
1,888 W		4.25	3.50	12.47	6.20	490.9	
4,901		5.05	4.35	1.08	5.40	501.1	
619			5.05		5.40	508.4	
4,380 W		5.25	5.23	1.17	5.25	505.1	
2,129		6.10	6.25	1.45	4.30	518.3	
1,778 W		7.00	7.35	2.15	3.35	523.3	
1,224					3.35	535.5	
15,047 OTCW		7.30 AM	8.15 PM	2.35 PM	3.00 AM	541.3	
		Arrive Daily	Arrive Daily	Arrive Daily	Leave Daily		
		(12.15)	(12.15)	(5.50)	(5.35)		

West-Bound Trains will have Absolute Right to the track over East-Bound Trains of the same or inferior class.—See Rule 84.
Trains must not exceed ten (10) miles per hour crossing Snake River bridge at the mouth of Burnt River.
Regular trains will not exceed Schedule Time and Extras and Light Engines will not exceed fifteen (15) miles per hour between Glenn's Ferry and Reverse.

Idaho Division—FIFTH DISTRICT—Wood River Branch.

Length of Sidings in feet, and location of Scales, Water, Fuel and Turning Stations.	WESTWARD			EASTWARD		
	Second Class			Second Class		
		17 Mixed	Distances from Shoshone	18 Mixed		
		Lv. Daily Except Sunday		Ar. Daily Except Sunday		
23,194	OTYCW	7.30AM	0	7.30PM		
1,250			18.5			
1,788	W	8.45	21.9	6.25		
1,816		9.08	29.7	6.00		
752	W	9.35	37.3	5.35		
1,825		10.25	52.1	4.55		
3,718	W	10.45	57.2	4.40		
2,750		11.08	68.4	4.20		
4,598	Y	11.30AM	69.4	4.00PM		
		Ar. Daily Except Sunday		Lv. Daily Except Sunday		
		(4.00)		(8.30)		

Time Table No. 2.
July 25, 1897.

STATIONS

N	SHOSHONE	S
	GRAVEL SPUR	
	PAGARL	
	TIKURA	
	PICABO	
D	BELLEVUE	V
D	HALLEY	Ri
	GIMLET	
D	KETCHUM	Ku

Montana Division—CACHE VALLEY BRANCH.

Length of Sidings in feet, and location of Scales, Water, Fuel and Turning Stations.	WESTWARD			EASTWARD		
	Second Class		First Class	First Class		Second Class
	15 Mixed	9 Cache Valley Express	Distances from Cache Junction	10 Salt Lake Express	16 Mixed	
		Leave Daily	Leave Daily	Arrive Daily	Arr. Daily Ex. Sunday	
8,028	CYW	9.00AM	10.55AM	4.15PM	5.15PM	
370						
1,505		9.40	11.20	3.50	4.30	
375						
5,234	W	10.20	11.40	3.30	3.50	
285						
1,645		10.00	11.59AM	3.10	3.10	
1,028	W	11.30AM	12.15PM	2.53	2.35	
340						
457						
1,475		12.05PM	12.35	2.35	2.05	
300						
3,768	Y	12.45PM	12.55PM	2.15PM	1.30PM	
		Ar. Daily Ex. Sunday	Arrive Daily	Leave Daily	Leave Daily Ex. Sunday	
		(3.45)	(2.00)	(4.2)	(2.00) (3.45)	

Time Table No. 2.
July 25, 1897.

STATIONS

D	CACHE JUNCTION	CJ
	PETERSBORO SPUR	
D	MENDON	Mq
	HOWELLS SPUR	
D	LOGAN	Q
	HYDE PARK	
D	SMITHFIELD	Sm
D	RICHMOND	Rn
	MERRILL'S SPUR	
	WEBSTER SPUR	
D	FRANKLIN	F
	WHITNEY	
D	PRESTON	Pn

West-Bound Trains will have Absolute Right to the track over East-Bound Trains of the same or inferior class.—See Rule 84.
Station Train Order Signal Lamps will not be kept burning after trains for the day have passed.

Montana Division—SIXTH DISTRICT—Ogden and McCammon.

Length of Sidings in feet, and location of Scales, Water, Fuel and Turning Stations.	WESTWARD				EASTWARD				
	Second Class		First Class		First Class		Second Class		
	27 Time Freight	19 Local Freight	9 Cache Valley Express	7 Butte and Portland Express	8 Salt Lake and Omaha Ex.	10 Salt Lake Express	20 Local Freight	28 Time Freight	
		Leave Daily	Leave Daily Ex. Sunday	Leave Daily	Leave Daily	Arrive Daily	Arrive Daily Ex. Sunday	Arrive Daily	Arrive Daily
59,682	CTYOW	12.20PM	5.00AM	9.15AM	10.20PM	7.25AM	5.55PM	3.00PM	7.15PM
6,378									
2,888		12.38	5.20	9.25	10.32	7.14	5.46	2.38	7.00
1,885		12.48	5.35	9.33	10.42	7.06	5.39	2.20	6.45
3,176		1.05	6.00	9.43	10.54	6.56	5.28	1.55	6.30
4,302	W	1.25	6.44	9.55	11.10	6.44	5.15	1.25	6.10
1,538		1.55	7.15	10.11	11.31	6.23	4.58	12.30PM	5.40
1,798	W	2.13	7.35	10.23	11.45	6.11	4.46	11.58AM	5.22
3,307		2.30	7.52	10.33	11.58PM	6.00	4.35	11.30	5.05
8,023	CWY	3.00	8.20	10.55AM	12.20AM	5.38	4.15PM	10.55	4.35
1,743		3.30	8.50		12.35	5.24		10.30	4.05
3,847	W	3.50	9.10		12.45	5.15		10.10	3.50
1,755		4.15	9.40		1.00	5.02		9.40	3.17
3,637	W	4.28	9.55		1.08	4.55		9.25	3.02
1,783		4.45	10.20		1.20	4.45		9.05	2.42
853	W	4.55	10.35		1.26	4.39		8.50	2.30
1,796		5.21	11.15		1.46	4.20		8.15	1.57
1,774		5.38	11.40		1.55	4.10		7.57	1.40
1,754		5.50	11.55AM		2.04	4.00		7.40	1.25
7,237	WY	6.10PM	12.25PM		2.15AM	3.45AM		7.20AM	1.00PM
The figures given below are for information only, and not for use in running.—See Time Table of Idaho Division, Second District for Running Time.									
7,357		6.10PM	12.25PM		2.15AM	3.45AM		7.20AM	1.00PM
76,826		7.20PM	2.00PM		2.55AM	6.00AM		11.45AM	
		Arrive Daily	Arr. Daily Ex. Sunday	Arrive Daily	Arrive Daily	Leave Daily	Leave Daily	Leave Daily Ex. Sunday	Leave Daily
		(7.00)	(9.00)	(1.40)	(4.55)	(134.2)	(4.30)	(1.40)	(9.00) (7.30)

West-Bound Trains will have absolute right to the Track over East-Bound Trains of the same or inferior class.—See Rule 84.
No Train or Engine will exceed ten (10) miles per hour between Slow boards in Bear River Cañon.

Montana Division—SEVENTH DISTRICT—Pocatello and Lima.

Length of Sidings in feet, and location of Rock, Water, Signal and Turning Stone.	WESTWARD			Distances from Ogden	EASTWARD		
	Time Table No. 2.				Time Table No. 2.		
	July 25, 1897.				July 25, 1897.		
	STATIONS				STATIONS		
	Second Class	First Class		Distances from Silver Bow	First Class	Second Class	
	29 Local Freight	27 Montana Fast Freight	7 Fast Mail		8 Fast Mail	28 Local Freight	30 Time Freight
	Leave Daily	Leave Daily	Leave Daily		Arrive Daily	Arrive Daily	Arrive Daily
76,326	OTYCW	11.00AM	8.00PM	4.05AM	134.3	N.....POCATELLO.....H	2.20AM 6.00AM 4.15PM
2,167		11.50AM	8.32	4.27	145.8	ROSS FORK.....Ca	1.55 5.25 3.20
3,510	W	12.40PM	9.05	4.50	158.2	N.....BLACKFOOT.....BT	1.30 4.50 2.25
740		1.30	9.38	5.10	168.8	HOWARD SPUR.....	1.05 4.05 1.30
1,750	W				175.6	BASALT.....	12.25 3.25 12.25PM
605		2.25	10.15	5.35	184.3	N.....IDAHO FALLS.....AK	12.21 3.00 11.45AM
3,924	W	3.00	10.38	5.51	198.0	PAYNE.....	12.05AM 2.35 11.10
1,611		3.30	11.00	6.05	201.2	N.....MARKET LAKE.....Ar	11.45PM 2.05 10.20
5,399	W	4.10	11.45PM	6.24	211.6	HAWGOOD.....	11.25 1.35 9.35
1,708		4.55	12.15AM	6.43	222.6	CAMAS.....	11.05 1.00 8.40
6,128	YW	5.45	1.00	7.05	234.4	N.....DUBOIS.....Dc	10.50 12.30 8.07
9,307	YCW	6.15	1.35	7.25	242.5	HIGH BRIDGE.....	10.39 12.05AM 7.42
1,831	W	6.40	2.00	7.42	247.9	D.....SPENCER.....Rc	10.28 11.45PM 7.15
2860		7.00	2.20	7.52	251.6	BEAVER CANON.....	10.10 11.15 6.40
5,014	YW	7.30	2.50	8.12	257.4	PLEASANT VALLEY.....	9.55 10.45 6.05
1,771		7.55	3.20	8.30	264.2	N.....MONIDA.....Mo	9.35 10.05 5.20
4,888	YW	8.30	3.50	8.46	272.6	WILLIAMS.....	9.20PM 9.30PM 4.45AM
1,836	W	9.00PM	4.15AM	9.00AM	279.3	N.....LIMA.....Rd	
17,531	TYW						

West-Bound trains will have Absolute Right to the track over East-Bound Trains of the same or inferior class.—See Rule 84.
East-Bound Trains must not exceed Schedule Time between Pleasant Valley and Beaver Canon.

Montana Division—EIGHTH DISTRICT—Lima and Silver Bow.

Length of Sidings in feet, and location of Rock, Water, Signal and Turning Stone.	WESTWARD			Distances from Ogden	EASTWARD		
	Time Table No. 2.				Time Table No. 2.		
	July 25, 1897.				July 25, 1897.		
	STATIONS				STATIONS		
	Second Class	First Class		Distances from Silver Bow	First Class	Second Class	
	29 Local Freight	27 Montana Fast Freight	7 Fast Mail		8 Fast Mail	28 Local Freight	30 Time Freight
	Leave Daily	Leave Daily	Leave Daily		Arrive Daily	Arrive Daily	Arrive Daily
17,531	TYW	9.45PM	8.00AM	9.20AM	279.3	N.....LIMA.....Rd	9.10PM 7.00PM 3.50AM
1,814	W	10.15	8.30	9.35	287.6	DELL.....	8.50 6.15 3.10
1,816		10.40	8.50	9.46	293.6	CRAB TREE.....	8.36 5.40 2.40
3,832	W	11.10	9.20	10.02	302.3	D.....RED ROCK.....Dk	8.17 4.55 1.55
1,972	W	11.45PM	9.50	10.17	311.0	GRAYLING.....	7.57 4.10 1.10
569					315.8	DALY'S.....	3.1
205					318.9	GRAY'S SPUR.....	0.9
1,834		12.25AM	7.18	10.35	319.8	BARRATT'S.....	7.39 3.25 12.25AM
9,084	TYW	1.10	7.45	10.50	327.5	N.....DILLON.....Dn	7.20 2.40 11.50PM
2,348		1.40	8.07	11.01	333.8	BOND.....	7.06 2.05 11.20
1,886		2.20	8.35	11.15	339.8	APEX.....	6.54 1.35 10.55
3,806	YW	3.05	9.05	11.34	347.8	GLEN.....	6.28 12.45PM 10.15
833					352.3	BROWN'S SPUR.....	6.1
4,758	OW	4.00	9.40	11.58AM	358.4	D.....MELROSE.....Vl	6.05 5.45 11.58AM 9.30
1,458					365.5	MAIDEN ROCK SPUR.....	1.4
295					366.9	GREEN'S SPUR.....	2.8
1,850		4.50	10.20	12.25PM	369.7	D.....DIVIDE.....J	5.15 10.50 8.45
1,305					371.5	DYER'S SPUR.....	2.3
2,148	W	5.20	10.35	12.37	373.8	WOODIN.....	5.04 10.35 8.25
487					378.5	EMAUDINE'S SPUR.....	1.9
4,388	Y	6.10	10.58	12.55	380.4	FEELY.....	4.49 10.00 8.00
1,764		6.35	11.12	1.08	384.4	BUXTON.....	4.36 9.35 7.35
5,426	YW	7.00AM	11.30AM	1.20PM	389.7	N.....SILVER BOW.....Sb	4.25PM 9.10AM 7.15PM

Figures below are for information only and not for use in running.—See Time Table of Montana Union Railway for Running Time.

West-Bound Trains will have Absolute Right to the track over East-Bound Trains of the same or inferior class.—See Rule 84.
Trains must not exceed Schedule Time descending Glen and Buxton Grades or between Melrose and Divide.

Utah Division—THIRD DISTRICT—Frisco and Juab.

WESTWARD			HASTWARD			Length of Sidings in feet and Location of Scales, Water, Coal and Turning Stations.
Second Class	1 Mixed Freight and Passenger	Leave Daily except Sunday	Second Class	2 Mixed Freight and Passenger	Arrive Daily except Sunday	
Time Table No. 2. July 25, 1897.			STATIONS.			
		7.30PM	D. FRISCO Co	8.45AM		9005
			6.1			11318 WCY
		8.45 9.10	D. SOLUS SPUR 10.8	7.05 6.25		
		10.00	D. MILFORD Fd	5.35		625
		10.50PM	29.5			1072 OW
			29.5			
		12.05AM	29.6			1461
			45.5			535
		12.45	30.8			527
		1.05	71.3			4090 Y
		2.00	84.4			388 W
		2.30	90.1			625
		2.40	95.1			1494
		3.15	106.0			1100
		3.35	111.2			5661
			112.0			707
		3.55	116.1			394
			118.5			1136
		4.25	127.0			
			129.8			341
			132.6			9005 WCY
		5.00AM	136.1			
		Arrive Daily except Sunday				

West-bound Trains will have absolute right to the track over East-bound Trains of the same or inferior class. See Rule 84.
 Special attention is called to change in direction of trains having right of track.
 Station Train Order Signal Lamps will not be kept burning after trains of the day have passed.

Utah Division—TINTIC BRANCH—Tintic and Lehi Junction.

Length of Sidings in feet and Location of Scales, Water, Coal and Turning Stations.	WESTWARD			Mileage from Tintic	Time Table No. 2. July 25, 1897.	STATIONS	Mileage from Lehi Junction	EASTWARD			
	Second Class	57 Way Freight	58 Passenger					51 Passenger	52 Passenger	54 Passenger	55 Way Freight
		Lv. Daily Ex. Sunday	Leave Daily					Leave Daily	Arrive Daily	Arrive Daily	Ar. Daily Ex. Sunday
						TINTIC	58.4				
				3.5		IRON TON	40.9				
11290	W		11.10AM	3.23PM		EUREKA Rk	55.1	11.05AM	3.20PM		
				1.9		MAMMOTH JUNCTION	58.3	10.57	3.14		
3829						MAMMOTH Mo	54.8	10.50	3.07		
			11.15	3.28PM		E. G. W. CROSSING	54.0				
				1.6		MAMMOTH JUNCTION	53.3	10.42	2.59		
3645	Y		11.20AM	3.32		SILVER CITY JUNCTION	51.9	10.38	2.55PM		
4017	Y		2.30PM	3.37		IRON TON	49.9	10.32	12.25PM		
410			2.45	3.46		SHARP	44.5	10.22	12.00		
749			2.58	3.51		DORRUS	41.8	10.17	11.45AM		
200						MAGINNIS SPUR	38.7				
433			3.28	4.01		DEL MONTE	35.8	10.05	11.00		
1046			3.37	4.07		RUSH VALLEY	32.4	9.58	10.40		
1279			4.23	4.23		5 MILE PASS	23.5	9.42	9.55		
2791			5.00	4.29		FAIRFIELD Fr	20.3	9.35	9.35		
1171	W		5.35	4.40		CEDAR PORT	15.2	9.25	8.45		
3095	OWCT		5.35PM	5.10PM		LEHI JUNCTION Ju		8.55AM	7.45AM		
			Ar. Daily Ex. Sunday	Arrive Daily				Leave Daily	Lv. Daily Ex. Sunday		
			4.05	.10	1.47	60.3	2.10	.25	4.40		

West-bound Trains will have absolute right to the track over East-bound Trains of the same or inferior class. See Rule 84.
 The line from Lehi Junction to Eureka will be known as the main line, and all switches must be set to main line.
 Station Train Order Signal Lamps will not be kept burning after trains for the day have passed.
 Special attention is called to change in direction of trains having right of track.

Utah Division—SILVER CITY BRANCH.

Length of Sidings in feet and Location of Scales, Water, Coal and Turning Stations.	WESTWARD		Mileage from Northern Sp. Min.	Time Table No. 2. July 25, 1897.	STATIONS	Mileage from Silver City Junction	EASTWARD	
	First Class	51 Passenger					52 Passenger	
		Leave Daily					Arrive Daily	
674					NORTHERN SPY MINE	4.9		
2711			2.50PM	3.0	SILVER CITY Sc	1.9	11.25AM	
				2.5	E. G. W. CROSSING	1.4		
3745	Y		2.55PM	4.9	SILVER CITY JUNCTION		11.20AM	
			Ar. Daily				Leave Daily	
			.05			.05		

TIME-TABLES.

19. A Time-table is the general law governing the arriving and leaving time of all regular trains at all stations. Time-tables will be issued from time to time, as may be necessary. The times given for each train on the Time-table is the Schedule of such train.

Copies of Time-tables will be furnished to all concerned. Train Dispatchers must know that every conductor and engineman has a copy of same before allowing them to occupy main track after it has taken effect, and must ascertain from conductor or engineman if such Time-table has been received; such inquiry and answer to be in the following form and copied in train order book:

Have you received employees' Time-table No. to take effect at. M. (date).

I have received employees' Time-table No. to take effect at. M. (date).

20. Each Time-table, from the moment it takes effect, supersedes the preceding Time-table, and all special instructions relating thereto; and trains shall be run as directed thereby, subject to the rules. All regular trains on the road running according to the preceding Time-table shall, unless otherwise directed, assume the times and rights of trains of corresponding numbers on the new Time-table.

21. Upon the Time-table not more than two sets of figures are shown for a train at any point. When two times are shown, the earlier is the arriving time and the later the leaving time. When one time is shown it is the leaving time, unless otherwise indicated.

Regular meeting or passing time is in full-faced type.

Both the arriving and leaving time of a train are in full-faced type when both are meeting or passing times, or when one or more other trains are to meet or pass it between those times.

In all cases trains are required to clear and follow as per rules 85 to 90 inclusive.

22. On the employees Time-table the words "daily," "daily, except Sunday," etc., printed at the head and foot in connection with a train, indicate how it shall be run. The figures given at intermediate stations shall not be taken as indicating that a train will stop unless the rules require it. The following signs placed before the figures indicate:

- "s"—regular stop.
- "f"—stop on signal to receive or discharge passengers or freight.
- "m"—stop for meals.
- "D"—day telegraph stations.
- "N"—night telegraph stations.
- "O"—scales.
- "C"—coal.

- "W"—water.
- "T"—turn-tables.
- "Y"—wyes.

Trains are designated by numbers and their class indicated on the Time-tables.

SIGNAL RULES.

SIGNALS.

23. Conductors, enginemen, firemen, brakemen, station agents, telegraph operators, switchmen, switchtenders, track foremen, road and bridge watchmen, and all other employes whose duties may require them to give signals must provide themselves with the proper appliances, and keep them in good order and always ready for immediate use.

24. Flags of the proper color must be used by day, and lamps of the proper color by night or whenever from fog or other causes the day signals cannot be clearly seen.

25. Red signifies danger, and is a signal to stop.

26. Green signifies caution and is a signal to go slowly.

27. White signifies safety, and is a signal to go on.

28. Green and white is a signal to be used to stop trains at flag stations for passengers or freight.

29. Blue is a signal to be used by car inspectors.

30. An explosive cap or torpedo, placed on the top of the rail, is a signal to be used in addition to the regular signals.

The explosion of one torpedo is a signal to stop immediately; the explosion of two torpedoes is a signal to reduce speed immediately, and look out for a danger signal.

31. A fusee is an extra danger signal, to be lighted and placed on the track at night, in cases of accident or emergency.

A train finding a fusee burning upon the track must come to a stop and not proceed until it is burned out.

Care must be taken not to throw off a fusee where it will do any damage by fire.

32. A flag or lamp swung across the track, a hat or any object waved violently by any person on the track, signifies danger, and is a signal to stop.

TRAIN SIGNALS.

33. Each train, while running, must display two green flags by day and two green lights by night, one on each side of the rear of the train, as Markers, to indicate the rear of the train. Yard engines will not display Markers.

34. Each train running after sunset, or when obscured by fog or other cause, must display the head-light in front, and two or more red lights in the rear. Yard engines must display two green lights instead of red, except when provided with a head-light on both front and rear.

Bell cord. 35. Each car on a passenger train while running must be in communication with the engine. In the absence of an equivalent appliance, a bell-cord must be attached to the signal-bell of the engine, passing through or over the entire length of the train, and secured to the rear end of it.

Green. 36. Two green flags by day and two green lights by night, displayed in the places provided for that purpose on the front of an engine, denote that the train is followed by another train, running on the same Schedule and entitled to the same Time-table rights as the train carrying the signals.

White. 37. Two white flags by day and two white lights by night, displayed in the places provided for that purpose on the front of an engine, denote that the train is an extra. These signals must be displayed by all extra trains, but not by yard engines.

Blue. 38. A blue flag by day and a blue light by night, placed at the end of a car or train denotes that car inspectors are at work under or about the car or train. The car or train thus protected must not be coupled to, or moved, until the blue signal is removed by the car inspectors.

When a car or train standing on a siding is protected by a blue signal, other cars must not be placed in front of it so that the blue signal will be obscured, without first notifying the car inspector, that he may protect himself, and not then until the signal is removed.

WHISTLE SIGNALS.

Whistle. 39. One long blast of the whistle is the signal for approaching stations, railroad crossings and junctions (thus, ———).

40. One short blast of the whistle is the signal to apply the brakes—stop (thus, —).

41. Two long blasts of the whistle is the signal to throw off the brakes (thus, ———).

42. Two short blasts of the whistle is an answer to any signal, except "train parted" (thus, —).

43. Three long blasts of the whistle (to be repeated until answered as provided in rule No. 62) is a signal that the train has parted (thus, ———).

44. Three short blasts of the whistle, when the train is standing (to be repeated until answered, as provided in rule No. 61) is a signal that the train will back (thus, ———).

45. Four long blasts of the whistle (thus, ———) is a signal to call in a flagman from the west.

Four long followed by one short blast of the whistle (thus, ———) is the signal to call in a flagman from the east.

46. Four short blasts of the whistle is the engineman's call for signals from switch-tenders' watchmen, trainmen and others (thus, ———).

47. Five short blasts of the whistle is a signal to the flagman to go back and protect the rear of the train (thus, ———).

48. One long followed by two short blasts of the whistle is a signal to be given by trains on single track, when displaying signals for a following train, to call the attention of trains of the same or inferior class to the signals displayed (thus, ———).

49. Two long, followed by two short, blasts of the whistle is the signal for approaching road crossings at grade (thus, ———). This signal will also be used where the view is obstructed by curves in case of trains running ahead of time, night trains when behind time after daylight and extra trains, at least once every mile.

50. A succession of short blasts of the whistle is an alarm for persons or cattle on the track, and calls the attention of trainmen to danger ahead.

50-a. Two short blasts given three times is the signal for air brakes sticking. See air brake rules.

BELL-CORD SIGNALS.

Bell cord. 51. One tap of the signal-bell, when the train is standing, is the signal to start.

52. Two taps of the signal-bell, when the train is running, is the signal to stop at once.

53. Two taps of the signal-bell, when the train is standing, is the signal to call in the flagman.

54. Three taps of the signal-bell, when the train is running, is the signal to stop at the next station.

55. Three taps of the signal-bell, when the train is standing, is the signal to back the train.

56. Four taps of the signal-bell, when the train is running, is the signal to reduce speed.

57. When one tap of the signal-bell is heard while a train is running, the engineman must immediately ascertain if the train is parted, and if so, be governed by Rule No. 103.

58. Signals of the same number of sounds shall have the same significance when given by other appliances than bell-cords and signal-bells.

LAMP SIGNALS.

Lamps. 59. A lamp swung across the track is the signal to stop.

60. A lamp raised and lowered vertically is the signal to move ahead.

61. A lamp swung vertically in a circle across the track, when the train is standing, is the signal to move back.

62. A lamp swung vertically in a circle at arm's length across the track, when the train is running, is the signal that the train has parted.

63. A flag, or the hand, moved in any of the directions given above, will indicate the same signal as given by a lamp.

FIXED SIGNALS.

64. Fixed signals are placed at junctions, railroad crossings, stations, and other points that require special protection. Special instructions will be issued indicating their position and use.

RULES GOVERNING USE OF SIGNALS.

Imperfect Signals. 65. A signal imperfectly displayed, or the absence of a signal at a place where a signal is usually shown, must be regarded as a danger signal, and the fact reported to the Superintendent.

Whistle prohibited. 66. The unnecessary use of the whistle is prohibited; when necessary in shifting at station and in yards, the engine bell should be rung, and the whistle used only when required by rule or law, or when necessary to prevent accident.

67. The whistle must not be sounded while passing a passenger train, except in cases of emergency or danger, or when required by the rules.

Acknowledge signal. 68. When a danger signal (except a fixed signal) is displayed to stop a train, it must be acknowledged as provided in rule No. 42.

Engine bell. 69. The engine-bell must be rung before starting a train, and when running through tunnels and the streets of towns or cities.

70. The engine-bell must be rung for a quarter of a mile before reaching every road crossing at grade, and until it is passed; and the whistle must be sounded at all whistling-posts.

Display signals. 71. When two or more engines are coupled to the head of a train, the leading engine only shall display the signals as provided in Rules No. 36 and 37.

Responsibility. 72. One flag or light displayed as a classification signal will be regarded the same as if two were displayed; but conductors and enginemen will be held responsible for the proper display of all train signals.

When pushing trains. 73. When a train is being pushed by an engine (except when shifting and making-up trains in yards) a white light must be displayed on the front of the leading car at night, or when the train is obscured by fog or other cause.

Changing tail lights. 74. When a train turns out to meet or pass another train, the red lights must be removed and green displayed as soon as the track is clear; but the red must again be displayed before returning to its own track.

Covering head lights. 75. Head-lights on engines when on side tracks or at the end of double tracks, waiting for trains, must be covered as soon as the track is clear and the train has stopped.

76. In case there is more than one train to take the siding, the engineman of the first train will not cover the headlight until all trains are on the siding and the switch set for the main track. The main track will be considered obstructed while the headlight is shown, but this will not relieve conductors from protecting their trains by flag.

77. The combined green and white signal is to be used to stop a train only at the flag stations designated by the schedule of that train. When it is necessary to stop a train at a point that is not a flag station for that train, a red signal must be used.

78. White signals must be used by watchmen at public road and street crossings to prevent persons and teams from crossing when trains are approach-

ing. Danger signals must be used only when necessary to stop trains.

Torpedoes. 77. Torpedoes must not be placed near stations or road crossings, where persons are liable to be injured by them.

Uniform signals. 78. All signals must be used strictly in accordance with the rules, and trainmen and enginemen must keep a constant lookout for signals.

TRAIN RULES.

CLASSIFICATION OF TRAINS.

Designation. 79. All trains are designated as regular or extra. Regular trains are those represented on the Time-table, and may consist of one or more sections. All sections of a train, except the last, must display signals as provided in Rule No. 36. Extra trains are those not represented on the Time-table. An engine without cars, in service on the road, shall be considered a train.

Classification. 80. All regular trains are classified on the Time-table with regard to their priority of right to the track; trains of the first-class being superior to those of the second, and all succeeding classes, and trains of the second class being superior to those of the third and all succeeding classes; and so on indefinitely. The terms passenger, freight or mixed are descriptive and do not refer to class.

Irregular trains. 81. Extra trains may be distinguished as Passenger Extra, or Special; Freight Extra; Work Train Extra.

Classification right. 82. All extra trains are of inferior class to all regular trains of whatever class.

MOVEMENT OF TRAINS.

83. A train of inferior class must in all cases keep out of the way of a train of superior class.

Direction right. 84. On single track, all trains in one direction, specified in Time-table, have the absolute right of track over trains of the same class running in the opposite direction.

Taking siding. 85. When trains of the same class meet on single track, the train not having right of track must take the siding and be clear of the main track before the leaving time of the opposing train; but such train must not pass the switch to back in on a siding, until after the arrival of the opposing train, unless otherwise directed by special instructions. When necessary to back in on the siding, before passing the switch, a flagman must be sent out in the direction of the opposing train as per rule No. 99.

Clearance. 86. When a train of inferior class meets a train of superior class on single track, the train of inferior class must take the siding and clear the train of superior class ten minutes. A train of inferior class must keep ten minutes off the time of a train of superior class following it.

87. A train or engine must not leave a station to follow a train or engine until ten minutes after departure of such train or engine unless some form of block signal is used.

88. All trains running in the same direction must keep not less than ten minutes apart, unless some form of block signal is used.

Responsibility. 89. When two or more trains are run in company they must be kept ten (10) minutes apart, except at meeting points, where they may close up to allow following sections to come in, but always with great care and train under perfect control. At such points the responsibility for a collision rests with the following train. The following train must approach all stations carefully expecting to find the leading train at the station. When fog, darkness, dangerous places, or other circumstances, render it necessary, the forward train, as an extra precaution, will send out a flagman; but it must be distinctly understood that this does not relieve the following train from responsibility for a collision.

Conductors and enginemen will be held equally responsible for the violation of any of the rules governing the safety of their trains, and they must take every precaution for the protection of their trains, even if not provided for by the rules.

Clear superior trains. 90. No train must leave a station expecting to meet or be passed at the next station by a train having the right of track, unless it has full schedule time to make the meeting or passing point, and clear the track by the time required by Rules Nos. 85 and 86.

Clear main track. 91. A train not having right of track must be entirely clear of the main track by the time it is required by rule to clear an opposing train or a train running in the same direction; failing to do so, it must be immediately protected as provided in Rule No. 99.

Ahead of time. 92. Except at meeting or passing points, as provided in Rules Nos. 85 to 91 inclusive, no train must arrive at a station in advance of its schedule arriving time, when shown.

No train must leave a station in advance of its schedule leaving time.

Caution stop. 93. All trains must stop at schedule meeting or passing points on single track, if the train to be met or passed is of the same class, unless the switches are plainly seen to be right, and the track clear. The point at which a train should stop is the switch used by the train to be met or passed in going on the siding.

When the expected train of the same class is not found at the schedule meeting or passing point, the train having right of track must approach all sidings prepared to stop, until the expected train is met or passed.

Junctions, railroad crossings and draw bridges. 94. All trains must approach the end of double track, junctions, railroad crossings at grade, and drawbridges, prepared to stop, and must not proceed until the switches or signals are seen to be right or the track is plainly seen to be clear. Where required by law, all trains must stop.

Leaving terminals. 95. No train must leave a junction, a terminal, or other starting point, or pass from double to single track, until it is ascertained that all trains due which have the right of track against it, have arrived.

Protecting Passenger trains. 96. When a passenger train is detained at any of its usual stops more than five minutes, the flagman must go back with danger signals and protect his train, as provided in Rule No. 99; but if it stops at any unusual point, the flagman must immediately go back far enough to be seen from a train moving in the same direction when it is at least one-half mile (sixteen telegraph poles) from the rear of his own train, and if the stop is over five minutes, he must be governed by Rule No. 99.

When it is necessary to protect the front of the train, the same precautions must be observed by the fireman. If the fireman is unable to leave the engine, the front brakeman must be sent in his place.

Protecting freight trains. 97. When a freight train is detained at any of its usual stops more than five minutes, where the rear of the train can be plainly seen from a train moving in the same direction at a distance of at least two-thirds of a mile (twenty telegraph poles), the flagman must go back with danger signals not less than one-eighth of a mile (four telegraph poles), and as much farther as may be necessary to protect his train; but if the rear of his train cannot be plainly seen at a distance of at least two-thirds of a mile, or if it stops at any point that is not its usual stopping place, the flagman must go back not less than one-half mile, and if his train should be detained until within ten minutes of the time of a passenger train moving in the same direction, he must be governed by Rule No. 99.

When it is necessary to protect the front of the train, the same precautions must be observed by the fireman. If the fireman is unable to leave the engine, the front brakeman must be sent in his place.

Flagmen designated. 98. When it is necessary for the flagman to go back to protect the rear of his train, the next brakeman must immediately take the flagman's position on the train, and remain there until relieved by the flagman; and on passenger trains the baggage master must take the place of the front brakeman whenever necessary.

Flagging torpedoes. 99. When a train is stopped by an accident or obstruction, the flagman must immediately go back with danger signals to stop any train moving in the same direction. At a point one-fourth of a mile from the rear of his train he must place one torpedo on the rail; he must then continue to go back at least one-half mile from the rear of his train and place two

torpedoes on the rail, ten yards apart (one rail length), when he may return to a point one-fourth of a mile from the rear of his train, and he must remain there until recalled by the whistle of his engine; but if a passenger train is due within ten minutes, he must remain until it arrives. When he comes in, he will remove the torpedo nearest to the train, but the two torpedoes must be left on the rail as a caution signal to any following train.

If any accident or obstruction occurs upon single track, and it becomes necessary to protect the front of the train, or if any other track is obstructed, the fireman must go forward and use the same precautions. If the fireman is unable to leave the engine, the front brakeman must be sent in his place.

99a. When a flagman is recalled and there is not a clear view for a quarter of a mile (eight telegraph poles) in rear of train, the train must start immediately on sounding of the whistle recalling flagman and be moved ahead, at a speed of not less than six miles per hour, until it reaches a point where the track is straight for a quarter of a mile (eight telegraph poles) in rear. A flagman must always bear in mind that the time of his return to his train is the time of greatest risk. He must be attentive, and should he see or hear a train approaching, he must remain and use every exertion to stop it in time to prevent accident. In foggy, stormy or snowy weather, or in vicinity of curves or descending grades the number of torpedoes used should be increased.

When a train is flagged the enginemen must obtain a thorough explanation of the cause before proceeding—coming to a full stop and picking up flagman if necessary.

Crossing double track. 100. Freight trains having work to do on any other track may cross over if no passenger train is due, provided no approaching freight train is in sight; and also provided that a flagman has been sent with danger signals, as provided in Rule No. 99, not less than one-half mile (sixteen poles), in the direction of the expected train.

Crossing on double track to pass trains. 101. When a freight train on double track turns out on to the opposite track to allow a passenger train running in the same direction to pass, and, while waiting, a passenger train from the opposite direction arrives, the freight train may cross back and allow it to pass, provided the other passenger train is not in sight; and also provided that a flagman has been sent with danger signals, as provided in Rule No. 99, not less than one-half mile in the direction of the expected train.

102. When it is necessary for a freight train on double track to turn out on to the opposite track to allow a passenger train running in the same direction to pass, and a passenger train running in the opposite direction is due, a flagman must be sent back with the danger signals, as provided in Rule No. 99, not less than one-half mile in the direction of the following train, and the freight train must not

cross over until one of the passenger trains arrives. Should the following passenger train arrive first, a flagman must be sent forward on the opposite track with danger signals, as provided in Rule No. 99, not less than one-half mile in the direction of the overdue passenger train before crossing over. Great caution must be used, and good judgment is required to prevent detention to either passenger train. The preference should always be given to the passenger train of superior class.

Trains parting. 103. If a train should part while in motion, trainmen must use great care to prevent the detached parts from coming into collision. Enginemen must give the signal as provided in Rule No. 43, and keep the front part of the train in motion until the detached portion is stopped.

The front portion will have the right to go back regardless of all trains, to recover the detached portion, first sending a flagman with danger signals one-half mile in the direction in which the train is to be backed, and running with great caution, at a speed not exceeding four miles per hour. On single track all the precautions required by the Rules must also be taken to protect the train against opposing trains. The detached portion must not be moved or passed around until the front portion comes back. This rule applies to trains of every class.

An exception will only be made to the above when it is known that the detached portion has been stopped and when the whole occurrence is in plain view, no curves or other obstructions intervening, so that signals can be seen from both portions of the train. In that event the conductor and enginemen may arrange for the re-coupling, using the greatest caution.

Pushing trains. 104. When a train is being pushed by an engine (except when shifting and making up trains in yards) a flagman must be stationed in a conspicuous position on the front of the leading car, so as to perceive the first sign of danger and immediately signal the enginemen.

Overdue trains. 105. A train starting from a station or leaving a junction, when a train of the same class running in the same direction is overdue, will proceed on its own time and rights, and the overdue train will run as provided in Rule 88 or 89.

On other train's time. 106. A train which is delayed, and falls back on the time of another train of the same class, does not lose its rights.

Twelve hour rule. 107. Regular trains twelve hours or more behind their schedule time lose all their rights.

Running around. 108. A train overtaking another train of the same or superior class, disabled so that it cannot move, will run around it, assuming the rights and taking the orders of the disabled train to the next telegraph office which is open, where it will report to the Superintendent. The disabled train will assume

the rights of the last train passing it, till the next telegraph office is reached.

Orders in writing. 109. All messages or orders respecting the movement of trains or the condition of track or bridges must be in writing.

Orders for signal. 110. Trains must not display signals for a following train without an order from the Superintendent.

Extra trains. 111. Extra trains must not be run on single track without an order from the Superintendent. On the arrival of an extra train at its appointed destination, or on its quitting the use of the road when authorized to run back and forth, the conductor (or engineer, in case of an engine or train without a conductor) shall notify the Superintendent to that effect in writing, to be sent by telegraph and placed on file by the sending operator, and all its rights to run shall then expire.

Taking down signals. 112. When signals displayed for a following train on single track are taken down at any point before the following train arrives, the conductor must inform the Superintendent promptly by telegraph, and also the operator or switchtender; and the latter, unless there is some other provision for the purpose, must notify all opposing trains of the same or inferior class leaving that point before the train arrives for which signals were displayed.

If signals are taken down at a point where there is no operator, switchtender, or other provision for the purpose, the conductor must notify all opposing trains of the same or inferior class until he reaches the next telegraph office, when he must inform the Superintendent; and the operator, unless there is some other provision for the purpose, must notify all opposing trains of the same or inferior class until directed otherwise by the Superintendent.

If the train for which signals were displayed leaves the main line at a point where there is no operator, switchtender, or other provision for the purpose, a flagman must be left to notify opposing trains that it has arrived.

Work trains. 113. Work trains will be run as extras under special orders, and will be assigned working limits.

Approach ing stations. 114. Great care must be exercised by the trainmen of a train approaching a station where any train is receiving or discharging passengers.

115. Enginemen must observe trains on the opposite track, and if they are running too closely together call attention to the fact.

Riding on engine, etc. 116. No person will be permitted to ride on engines, or in baggage, mail, or express cars, except employes, in the discharge of their duties, without a written order from the proper authority.

Responsibility for switches. 117. Conductors will be held responsible for the proper adjustment of the switches used by them and their trainmen, except where switchtenders are stationed.

Whoever opens a switch shall remain at it until it is closed, unless relieved by some other competent employe.

When there is more than one train to use a switch it must not be left open unless one of the trainmen of the following train is at the switch and takes charge of it.

At meeting or passing points, the employe attending the switch, will, after locking it to main track, take position on opposite side of track from the switch-stand, and remain there until the expected train has passed.

Except to prevent accident, switches must never be turned when an engine or car is on slide rail.

Reports. 118. Accidents, detention of trains, failure in the supply of water or fuel, or defects in the track or bridges must be promptly reported by telegraph to the Superintendent.

Leaving signal. 119. No train shall leave a station without a signal from its conductor.

Taking safe side. 120. In all cases of doubt or uncertainty, take the safe course and run no risks.

SPECIAL RULES.

Exclusiv service required. 200. Each person in the employ of the Company is to devote himself exclusively to its service, attending during the prescribed hours of the day or night, and residing wherever he may be required.

Not to use Company credit. 201. Unless appointed to do so, he is not to receive money on the Company's account. To use the credit of the Company is forbidden, unless special authority is given by the proper official.

202. Ties, timber, coal or other material (whether old or new), must not be taken for the use of employes or others.

Report theft, misconduct or negligence. 203. All employes, especially those in places of trust, are required to report any misconduct or negligence affecting the interest or safety of the Company, and withholding such information, will be considered a proof of negligence or indifference, and treated accordingly.

Company property. 204. Employes leaving the Company's service must deliver up the property entrusted to their care, or at any time when demanded by proper authority.

Gentlemanly deportment enjoined. 205. Persons having control of men must never curse or abuse them. Boisterous, profane or vulgar language is forbidden. Employes must not enter into altercation with any person, no matter what provocation may have been given, but will make note of the facts and report to their immediate superiors.

Testimonials and gratuities forbidden. 206. Employes are forbidden to offer testimonials to their superiors either directly or indirectly, and those in authority will not accept such presents or testimonials. The acceptance of gratuities or rewards from passengers or other patrons of the Company is forbidden.

Drinking and smoking prohibited. 207. The habitual use of intoxicating drink by employes will be considered good cause for dismissal from the service. Smok-

<p>ing is not allowed about the shops, station buildings and warehouses. Employees at stations and on passenger trains are prohibited from smoking when on duty.</p>	<p>sengers may be carried on the first section upon special orders from the Superintendent.</p>	<p>In no case must a train be backed over a public crossing or highway unless there is a man on rear car to see that crossing is clear; nor must a car be out loose and allowed to run over a public crossing or highway unless there is a man on car. At night the man referred to must display a light.</p>	<p>they must be replaced. In case agents' orders are unreasonable, the facts must be reported to the Superintendent; but the agents' orders must be carried out if practicable without endangering or delaying passenger trains. Agents will report violations of this rule, and all cases where conductors refuse to take cars that are ready to go.</p>	<p>Shortly before reaching a station at which the train stops, the brakemen and porters will pass through the train, except the sleeping cars, and announce distinctly, twice in each car, (with the doors closed) the name of the station they are approaching. At junction stations and crossings where trains leave in different directions, the conductor of each train must cause to be announced distinctly in each passenger car, before starting, the direction in which the train is to go and the principal stations on the route. Upon leaving a station conductors will cause the name of the next station at which the train will stop to be called inside of each car. If there are no brakemen or porters on the cars, this duty will devolve upon the conductors.</p>	<p>for insubordination, violation of rules, or any improper action, and will see that nothing improper is offered for sale, and should there be, they will suppress it and promptly report the facts to the Superintendent. News Agents must not be allowed to annoy passengers by urging their sales, leaving books and articles with them unsolicited, or in any other manner.</p>
<p>Not to engage in other business. 208. No employe will be permitted to engage in other business, without the consent of the Head of the Department under whom he may be employed, approved by the General Manager.</p>	<p>Light engine to run as first section. 219. When a light engine or special train is sent over the road on the time of a regular train, it shall be run as the first section.</p>	<p>Storms. 227. In case of an extraordinary rain storm or high water, trains must be brought to a stop and a man sent out to examine bridges, trestles, culverts and other points liable to damage, before passing over.</p>	<p>Care of live stock. 234. Conductors of trains carrying live stock will consult the wishes of the stockmen in matters pertaining to the care and comfort of the stock. Especial attention must be given to stock unaccompanied by drovers. In warm weather trainmen will water hogs as often as may be necessary.</p>	<p>Calling stations and junctions. 240. Conductors will prevent any unnecessary noise about passenger trains, particularly at night, and not allow employes to enter or pass through sleeping or dining cars, except when necessary in the discharge of their duties. While meals are being served in dining cars, conductors, trainmen and news agents must, as far as possible, avoid passing through those cars and must remove their hats while in the cars. Conductors will not collect tickets or fare from passengers while at meals, except when it is necessary to do so, and will not permit news agents to carry their wares through the dining cars at meal time except under special circumstances. Care must be taken in switching and handling passenger cars, to disturb the occupants as little as possible.</p>	<p>Confidence men, beggars, etc. 245. Conductors must look out for confidence men, monte players, prize package vendors and other swindlers, and when known to be on the train must have them watched, and personally warn passengers and otherwise prevent their operations on the train, and report case by wire to the Superintendent. They must not permit beggars, gamblers or unauthorized peddlers to practice their vocations on the train, or allow advertising matter to be distributed.</p>
<p>Absence without leave. 209. No employe will be allowed to absent himself from duty, without permission from proper authority.</p>	<p>Engine men handle their own engines. 220. Enginemen must not allow others to handle their engines, except their own firemen, the engineman remaining upon the engine and being responsible.</p>	<p>Conductors will make careful inquiry at all stopping places, and when thought advisable make extra stops to ascertain the extent and severity of storms, taking no risk. In case of doubt as to safety of proceeding, they will place their trains upon the siding and remain there until certain it is safe to proceed. 228. When a conductor discovers anything wrong with the track, bridges or culverts, which would be likely to cause an accident to a following train, he must not rely wholly upon the telegraph to notify other trains, but must leave a flagman.</p>	<p>Close doors. 235. The doors of empty cars hauled in trains must be kept closed. Trainmen will be held responsible for the proper care and protection of goods and property while in transit in their trains, and they must see that the doors of loaded cars are properly secured and protected as required.</p>	<p>Prevent unnecessary noise. 240. Conductors will prevent any unnecessary noise about passenger trains, particularly at night, and not allow employes to enter or pass through sleeping or dining cars, except when necessary in the discharge of their duties. While meals are being served in dining cars, conductors, trainmen and news agents must, as far as possible, avoid passing through those cars and must remove their hats while in the cars. Conductors will not collect tickets or fare from passengers while at meals, except when it is necessary to do so, and will not permit news agents to carry their wares through the dining cars at meal time except under special circumstances. Care must be taken in switching and handling passenger cars, to disturb the occupants as little as possible.</p>	<p>Inspect bulletins. 246. Conductors and enginemen will carefully inspect Bulletin Boards before starting from terminal stations.</p>
<p>Employees discharged not to be re-employed. 210. A person discharged from one Department or Division, shall not be employed in another without the written consent of the General Manager.</p>	<p>Striking stock. 221. Enginemen must use great care to avoid striking stock. If necessary, bring the train to a full stop. Should any stock be killed or injured, the engineman must report same on the prescribed forms.</p>	<p>Must leave flagman in case of anything wrong with roadway. 228. When a conductor discovers anything wrong with the track, bridges or culverts, which would be likely to cause an accident to a following train, he must not rely wholly upon the telegraph to notify other trains, but must leave a flagman.</p>	<p>Must not delay trains for meals. 236. Conductors and enginemen are prohibited from going to meals, or delaying their train for any cause, after receiving an order to proceed, without permission from the Superintendent. If permission is received, the conductor must report for further orders when ready to go.</p>	<p>Passengers not allowed to ride on platform, etc. 241. Conductors will see that passengers are seated, and not permit them to ride on the platform. Freight train conductors must allow none but train crew to ride on freight cars.</p>	<p>Registering. 247. Conductors of all trains must enter in train register book at terminal stations, or wherever such books are kept, the time of arrival and departure of their trains and all information called for by same.</p>
<p>Exercise care to prevent accidents. 211. Every person, accepting a position with this Company, does so with the full knowledge of the dangers, incident to the operation of railways and agrees to exercise due care in the performance of his duties, to prevent accident to himself or others, and before using them to see that the machinery or tools which he is to use are in a safe condition to perform the services required.</p>	<p>Full trains. 222. Conductors and enginemen are required to fill up trains to the full capacity of their engines.</p>	<p>Reports. 229. In making reports of accidents and unusual occurrences, the situation must be fully, clearly and precisely stated, with all relative facts and particulars necessary to a clear understanding of them, as known to the person making the report, without necessity for inquiries to extract such information. Exaggerations must be avoided.</p>	<p>Conductors to be on duty thirty minutes. 237. Conductors and brakemen are required to be on duty at least thirty minutes in advance of their leaving time. Passenger brakemen will remain by their trains to assist passengers, examine tickets and answer inquiries.</p>	<p>Collect fare. Passes. 242. Conductors will collect fare from all persons traveling without a ticket or pass, and will be allowed no discretion in the matter. Persons entitled to free transportation will be furnished with passes upon application to the proper officials. Fares wrongfully collected will be refunded.</p>	<p>Identification of trains. 248. Conductors of trains when meeting each other by special order will fill up and exchange identification tickets, showing number of train and number of engine.</p>
<p>Not to incur undue risk. 212. Employees are not expected to incur any risk of injury which they can avoid by the exercise of judgment and care.</p>	<p>Meeting under danger signals. 223. In case trains under danger signals should meet between stations, the train nearest to a siding should be backed.</p>	<p>Car must not be thrown down embankments or turned over to clear track. 230. When cars leave the track, they must not be turned over, thrown down embankments, broken up or otherwise damaged, merely to get them out of the way. Every effort must be made by trainmen to put them on the track with as little injury as possible, and take the damaged cars to a siding. The conductor will call on section men or any other convenient force, for assistance, which must be promptly rendered.</p>	<p>Rear brakemen and fireman to have danger signals ready for use. 238. A Brakeman must always be stationed on the rear car of every train; and must have in his possession a red flag by day, and red and white lanterns (lighted) by night; also six torpedoes ready for immediate use. Every engine must carry a similar equipment of signals for use by the fireman. Conductors and enginemen must know that their brakemen and firemen are conversant with and properly understand the application of rules relating to flagging of trains. Conductors of freight trains must see that their brakemen are on top of the train before reaching the whistling post approaching and passing stations. Brakemen must not apply brakes so tightly as to slide a wheel nor allow the brake to remain applied over three minutes while in motion, but in descending grades will use the brake of several cars to check and regulate the train and change brakes frequently. Sticks must not be used to turn the brake wheel in applying brakes.</p>	<p>Freight trains not to carry passengers except as provided. 243. Freight trains will not carry passengers except as designated in the Special Rules. Trains so designated will carry employes with passes and passengers when provided with proper transportation as required by the rules.</p>	<p>Arrangement of cars in train. 249. Passenger trains must be made up in following order: Fruit, mail, express, baggage, smoking, Second-class coaches, First-class coaches, Chair and Sleeping cars. Freight and mixed trains in the following order: Freight cars equipped with Miller, Janney or other similar Coupler and Air Brake must be hauled in forward part of trains; freight cars not equipped with Air Brakes or Air Pipes and connections must be placed in rear of Air Brake Cars. Passenger equipment will be placed in rear of such trains.</p>
<p>Warnings. 213. Employees are warned not to catch on to the front or rear end of the engine as it approaches them, or to jump on or off trains or engines moving at a high rate of speed, or to get between cars in motion to uncouple them, or to follow other dangerous practices.</p>	<p>Speed of trains. 224. First-class trains when behind time must not exceed card time unless the condition of track, weather and all circumstances warrant their doing so with safety.</p>	<p>Mark disabled cars "Bad Order." 231. Conductors will see that the words "Bad Order" are written with chalk on both sides of bad order cars left at stations, and defective part marked with a cross, and report same to Superintendent by telegraph.</p>	<p>Heating, lighting and ventilation of cars. 239. Conductors must give particular attention to the safety and comfort of their passengers. Careful attention must be given to the Heating, Lighting and Ventilation of cars and the supply of water in the tanks. Brakemen and train porters will be required to assist ladies, children and infirm persons off and on the cars. Conductors will perform this duty themselves when necessary.</p>	<p>News Agents. 244. News Agents must not be allowed to discharge their duties unless equipped with the cap and badge designated for them to wear. Neatness in personal appearance is required.</p>	<p>Switch to be set to main track and locked. 250. Switches, when not in actual use, must be set for the main track and locked. Agents are responsible for the proper position and security of switches at their stations, and must know personally, at least ten minutes before the regular trains are due, and before leaving their stations at night, that switches are secure and everything is right for safe passage of trains.</p>
<p>Report defects. 214. Employees are directed to report to the Superintendent any defects in tracks, machinery or appliances of the road, liable to cause accident.</p>	<p>Accountability for delays. 225. Conductors, enginemen and agents will be held to strict account for delays resulting from bad management of their own or on the part of those for whom they are responsible.</p>	<p>Authority to take freight engine. 232. Should an engine on a passenger train be disabled on the road, the conductor may take any freight engine available.</p>	<p>Placing cars at stations. 233. Conductors will comply with instructions of agents in placing cars and doing other station work. If necessary to move cars for loading or unloading,</p>	<p>Passengers not allowed to ride on platform, etc. 241. Conductors will see that passengers are seated, and not permit them to ride on the platform. Freight train conductors must allow none but train crew to ride on freight cars.</p>	<p>Cars not to stand on main track. 251. Agents must not allow cars to stand on main track for loading or any other purpose without special permission from the Superintendent in each</p>
<p>Not to remove appliances. 215. Employees must not remove any of the appliances of the engine or cars, for the sake of convenience in switching, thereby endangering those who are required to make couplings. Drawheads, drawbars and coupling apparatus must be examined before coupling is made, and if there is anything dangerous, the coupling must not be made but the fact reported to proper official.</p>	<p>Promptness and dispatch are urgently enjoined in transacting business at stations, taking water, oiling, etc. Station work should be done immediately on arrival.</p>				
<p>Miller hook coupling. 216. Employees will not attempt to make a coupling if the car or engine is moving faster than a man ordinarily walks. In coupling the Miller hook with other styles of drawbars, first insert the link in the hook, using pin chained to the Miller platform.</p>	<p>Clean public crossings. 226. Conductors and switchmen must open their trains to clear all public crossings while standing at stations and in no case block a public crossing longer than five (5) minutes. When passenger trains are at stations, care must be taken by freight conductors and switchmen to open their trains to allow passage way for persons going to and from the passenger train.</p>				
<p>Enginemen to handle engines carefully. 217. Enginemen must exercise great care in handling their engines while yardmen or others are making couplings, and give close attention to signals.</p>					
<p>Passengers carried on last section only. 218. In case freight trains, on which passengers are allowed to be carried, are run in sections, the last section of the train only will be permitted to carry passengers, except persons in charge of live stock and freight, and unless otherwise ordered, the last section will do the local work. When the last section is more than one hour behind the first, pas-</p>					

TRAIN IDENTIFICATION TICKET.

This Train is..... Section, Train No..... Engine No.....

Carrying..... Signals. From..... to..... Station.

..... 18..... Conductor.

case. He must know that cars on siding properly clear main track, that brakes are applied, and wheels locked when necessary.

252. Agents will see that the doors and other openings of loaded cars are closed and securely fastened before being placed in trains, and that the doors of cars loaded with powder, oil, hay, straw, or other inflammable material, are battened, and placed in train near the caboose or at least ten cars distant from the engine, as a protection against fire. Conductors and agents must examine the fastenings of cars, and keep such a record of their condition as will enable them to answer all inquiries. All doors of loaded cars must be sealed, and those not provided with locks or other secure fastenings, must be cleated so that the door of every loaded car will be properly secured.

253. Sending personal packages or letters on private business by trains, is strictly prohibited. Communications by trains must be exclusively on official business.

254. Agents are required to make daily inspections of yards, platforms, offices, buildings, and surroundings, and will co-operate with Supervisors and Roadmasters in maintaining the neat and tidy appearance of same.

255. Cars containing time freight will (in addition to notation on way-bills) be designated by cards in the following form, tacked on doors on each side of car:

TIME FREIGHT.

Car Initial.....No.....For.....Station.
From.....Station.....189.....

This car must have quick dispatch and preference over other cars not likewise carded.

If for any cause the car has to be set out, conductors will telegraph Superintendent and state reason for same.

N. B.—This card must be detached by receiving agent, endorsed on back with required information, and sent by first passenger train to the General Freight Agent.

ENDORSEMENT ON BACK.

Car received at.....Station, in Train No.on the.....day of.....189.....

.....Agent.

These cards must be removed by receiving agents properly filled out and forwarded as directed.

256. Agents, operators, bridge and section men will advise the Superintendent promptly as to severity of storms and extent of damage, and also notify trainmen.

257. No person will be permitted to engage in train service without first passing the prescribed examination on these rules.

**TRACKMEN, BRIDGEMEN, WORK-
TRAINMEN, AND WATCHMEN.**

258. All persons engaged in track or bridge work shall keep sharp look out for trains from either direction, and shall not assume that a train may not come for any certain time; nor act on the assurance of any person to that effect; and will protect themselves at all times with proper signals, as per Rule 99.

They must bear in mind that under the telegraph system a train may be expected at any moment.

259. Roadmasters are responsible for the safety of track, good condition of road bed, fences, right of way and grounds, and neat and tidy appearance of stations, buildings and surroundings. They will frequently examine bridges, culverts, water stations and other structures, and promptly report any defects or failure to Superintendent and Supervisor.

260. Supervisors are responsible for the safety and good condition of bridges, culverts, buildings and other structures. They will co-operate with Roadmasters in protecting the interests of the Company in all respects.

261. Supervisors, Roadmasters, and others employing foremen, will be held responsible for the proper understanding of these rules by their foremen.

262. Foremen must know that their gangs are always supplied with the proper signals, and they will be held responsible for the strict observance of these rules by their men.

263. At all times when work is going on which renders the track unsafe for trains to pass at their usual rate of speed, proper signals must be sent out at least one quarter of a mile from the spot, in each direction, as a caution to approaching trains. After or during severe storms, or a thaw, a man must be sent over the road before the passage of regular trains for the purpose of ascertaining if track is safe.

264. Before a rail or frog is taken out, or any obstruction caused to the main track, or when any break or obstruction is discovered, the signal of danger must be sent out in both directions at least one-half mile from the point of danger, and a faithful man must remain and keep it displayed until he is recalled by the foreman, which must not be done until the track is known to be safe.

265. A red light or flag, when used as a danger signal, must be in the hands of a reliable man.

266. Foremen and men in their employ, must at all times hold themselves in readiness to aid the passage of trains; and in case of accident or delay, will obey the orders of the conductors.

267. Section foremen must pass over and examine their sections daily, and ascertain that the track, slopes, cuts, bridges, switches, etc., are safe, and make necessary repairs. This should be done in the morning.

268. In case of extraordinary storms or high water, foremen must be out with their men (day and night) with proper signals, and watch those places most liable to damage, and take every precaution to prevent accident.

269. No wood, timber, freight, or material of any kind will be allowed within six feet of the main track. The exact location of elevators, ware-houses, coal yards, lumber yards or wood yards, for outside parties, will be fixed by the Division Engineer, but shall not in any case be less than fifty feet from the center line of a main track, nor at a less distance than five and one-half feet from the nearest rail in side track to nearest part of building, nor less than one hundred and fifty feet from any of the Company's buildings. In no event will any such structure be located on any main or passing track or on the lead of any track. Rocks, trees, or other obstructions liable to fall on the track, must be immediately removed.

270. It is the duty of all employees to put out fires set by engines, or otherwise, and to guard the property of others as well as that of the Company, exposed to such fires, whether responsibility attaches to the Company or not.

271. Track and bridgemen will pay particular attention to the telegraph line. In case the wires are found broken or on the ground, crossed or in any way obstructed, they must be repaired in a temporary manner immediately, and where such repairs are impracticable, notice must be given by telegraph, messenger or the earliest means practicable.

272. Foremen must look after water stations and will see that the water supply is kept up, and promptly report any failure or defect, and also see that fences and cattle guards are in good repair. A break in a fence should not be overlooked, and when it cannot be repaired for want of materials, the foreman will give the roadmaster immediate notice of it stating what material is required. When fences are taken down for any purpose, they must be immediately replaced.

273. Hand cars or other property of the Company must not be used except on the business of the Company.

274. Foremen and others employing watchmen, must see that they understand and attend to their duties.

275. Watchmen will be required to report promptly any accident or risk of accident, or occurrences not consistent with safety or good order.

276. When day and night watchmen are employed, they must not leave their posts until relieved.

277. When the time of watchmen is not wholly occupied with watching, they will perform such other duties as may be required of them.

278. The rounds of road watchmen or track walkers must be so arranged as to pass over their section in advance of passenger trains when practicable. They will carefully examine the roadway, keeping a sharp lookout for broken rails; observe switches, try locks, and see that they are in proper order; see that cars clear the main track; examine buildings and other property, and protect same from theft, fire, or other damage. Should an obstruction or anything occur that would be liable to endanger trains, they will at once display danger signals, as directed in the rules, and send word to their foreman and to the nearest telegraph office.

279. Bridge and snow-shed watchmen must pass over their beats immediately after the passage of trains, keeping sharp lookout for fire. They are responsible for the cleanliness about structures, and must remove combustible matter from their vicinity; make frequent examinations and report any decay or failure; they will allow no one but employees upon bridges or structures.

**RULES FOR THE MOVEMENT OF
TRAINS BY TELEGRAPHIC
ORDERS.**

500. Special orders, directing movements varying from or additional to the time-table, will be issued by the authority and over the signature of the Superintendent. They are not to be used for movements that can be provided for by rule or time-table. They must not contain information or instructions not essentially a part of them.

They must be brief and clear, and the prescribed forms must be used when applicable; and there must be no erasures, alterations or interlineations.

Transfers of orders from one dispatcher or operator to another shall be in writing in the train order book, dated and timed, with complete list of unexpired orders; or if done by telegraph the above shall be transmitted; an understanding returned and "Complete" given, before the authority is exercised by another person.

501. Each order must be given in the same words to all persons or trains directly affected by it, so that each shall have a duplicate of what is given to the others. Preferably an order should include but one specified movement.

502. Orders will be numbered consecutively for each day as issued, beginning with No. 1 at midnight.

503. Orders must be addressed to those who are to execute them, and the place at which each is to receive his copy. Those for a train must be addressed

to the conductor and engineman, and also to a person acting as pilot. A copy for each person addressed must be supplied by the operator.

504. Each order must be written in full in a book provided for the purpose at the chief dispatcher's office; and with it must be recorded the names of train men and others who have signed for the order; the time and signals, showing when and from what offices the order and responses were transmitted; and the train dispatcher's initials. These records must be made at once on the original copy, and not afterward, from memory or memoranda.

505. The terms "superior right" and "inferior right" in these rules, refer to the rights of trains under the time table and train rules and not to rights under special orders.

506. When an order is to be transmitted, the signal "31" (as provided in Rule 509), meaning "Train Order," will be given to each office addressed, followed by the word "copy," and a figure indicating the number of copies to be made, if more or less than three—thus, "31 copy 5."

507. An order to be sent to two or more offices must be transmitted simultaneously to as many as practicable. The several addresses must be in the order of superiority of rights of trains, and each office will take only its proper address. When not sent simultaneously to all, the order must be sent first for the train having the superior right of track.

508. Operators receiving orders must write them out in manifold during the transmission, and make the requisite number of copies at one writing, or trace others from one of the copies first made.

509. When an order has been transmitted, preceded by the signal "31," operators receiving it must (unless otherwise directed) repeat it back at once from the manifold copy, and in the succession in which their several offices have been addressed. Each operator repeating must observe whether the others repeat correctly. After the order has been repeated correctly by the operators required at the time to repeat it, the response "O K," authorized by the Train Dispatcher, will be sent, simultaneously to as many as practicable, naming each office. Each operator must write this on the order with the time, and then reply "i O K," with his office signal.

Operators shall read orders aloud to the conductors and enginemen addressed, and require them to sign their names thereon in proof of receipt and understanding. They will then transmit to the dispatcher, the signatures taken, and if approved by reply "Complete," enter the same upon the order with time received, sign their own names thereon in place provided, and deliver a copy to each conductor and engineman addressed.

Operators shall not allow a copy of an order to leave their possession until complete, as prescribed in

these rules, nor enter "Complete" thereon in advance of its receipt, nor sign their names thereon until the order is otherwise all complete.

510. For an order preceded by the signal "31," "complete" must not be given to the order nor delivery to a train of inferior right until "O K" has been given to and acknowledged by the operator who receives the order for the train of superior right. Whenever practicable, the signature of the conductor and engineer of the train of superior right must be taken to the order and "complete" given before the train of inferior right is allowed to act on it.

After "O K" has been given and acknowledged and before "complete" has been given, the order must be treated as a holding order for the train addressed; but must not be otherwise acted on until "complete" has been given.

If the line fails before an office has received and acknowledged "O K" to an order preceded by the signal "31" the order at that office is of no effect, and must be there treated as if it had not been sent.

513. The order, the "O. K." and the "complete" must each, in transmitting, be preceded by "31," and the number of order thus, "31" No. 10. In transmitting the signature of a conductor it must be preceded by "31," the number of the order, and the train number, thus, "31, No. 10, Train No. 5." After each transmission and response the sending operator must give his office signal.

The operator who receives and delivers an order must preserve the lowest copy. On this must appear the signatures of those who sign for the order, and on it he must record the time when he receives it; the responses; the time when they are received; his own name; the date; and the train number, for which places are provided in the blanks. These copies must be sent to the Superintendent daily.

Orders used by conductors must be sent by them daily to the Superintendent.

Enginemen will place their orders in the clip before them until executed.

For orders delivered at the Dispatcher's office the requirements as to record and delivery will be the same as at other points.

Orders to persons in charge of work requiring the use of track in yards or at other points, authorizing such use when trains are late, must be delivered in the same way as to conductors of trains.

An order to be delivered to a train at a point not a telegraph station, or while the office is closed, must be addressed to

"C. and E., No. — at — care of —," and forwarded and delivered by the conductor or other person in whose care it is addressed. "Com-

Doors and other openings of cars to be fastened.

Personal letters and packages on trains prohibited.

Agents to make daily inspection of buildings and yards.

Time freight.

Look out for trains.

Responsibility of Roadmasters.

Bridge Supervisors.

Examination on rules.

Keep supplied with proper signals.

Display signals when track is unsafe.

Danger signals.

Danger signals.

Aid in passage of trains.

Examine sections daily.

To be out in stormy weather.

Track clearance.

Put out fires.

Repair telegraph lines.

Look after water supply and keep fences in repair.

Hand cars.

See that watchmen are attentive.

Report violation of rules.

Watchman always on duty.

Perform other duties when not engaged watching.

Go over sections in advance of passenger train.

Special orders.

Duplicate orders.

How numbered.

To whom addressed.

Dispatchers records.

Definition of rights.

Use of signal 31.

Simultaneous transmission.

Manifold copies.

Repeating.

Operators read orders aloud.

Correct to superior train.

Treated as holding order.

Void if line fails.

Preceded by signal 31.

Operators' copy.

Conductors' copy.

Enginemen's copy.

Delivered at Dispatcher's office.

Others.

Non-telegraph office.

plete" will be given upon the signature of the person by whom the order is to be delivered, who must be supplied with copies for the conductor and engine-man addressed, and a copy upon which he shall take their signatures. This copy he must deliver to the first operator accessible, who must preserve it, and at once advise the Train Dispatcher of its having been received.

Orders so delivered to a train must be compared by those receiving them with the copy held by the person delivering and acted on as if "complete" had been given in the ordinary way.

Orders must not be sent in the manner herein provided, to trains the rights of which are thereby restricted.

520. In moving trains by Special Order, each section shall be considered as a separate and distinct train, and designated by its proper section and train number, and shall receive and run only under Special Orders addressed to its own conductor and engine-man.

521. Meeting orders must not be sent for delivery to trains at the meeting point if it can be avoided. When it cannot be avoided, special precautions must be taken by the train dispatchers and operators to insure safety, and the following words must be inserted in the order:

"This order to number _____ at meeting point." There should be, if possible, at least one telegraph office between those at which opposing trains receive meeting orders.

Orders should not be sent an unnecessarily long time before delivery, or to points unnecessarily distant from where they are to be executed. No orders (except those affecting the train at that point), should be delivered to a freight train at a station where it has much work, until after the work is done.

522. A train, or any section of a train, must be governed strictly by the terms of orders addressed to it and must not assume rights not conferred by such orders. In all other respects it must be governed by the Train Rules and Time-table.

523. Orders on effect continue so until fulfilled, suspended or annulled. Orders held by or issued for a regular train which has lost its rights, as provided by Rule 107, are annulled and other trains will be governed accordingly.

524. A fixed signal must be used at each train order office which shall display red when trains are to be stopped for orders. When there are no orders the signal must display white.

When an operator receives the signal "31" he must immediately display red, and then reply "red displayed." The signal must not be changed to white until the object for which red is displayed is accomplished.

While red is displayed all trains must come to a full stop, and any train thus stopped must not proceed without receiving an order addressed to such train, or a clearance card on form specified below, stating over the operator's signature that he has no orders for it. The issue of clearance cards must be authorized by Dispatchers in all cases, except that when lines are not working, they may be issued without such authority.

ceed without receiving an order addressed to such train, or a clearance card on form specified below, stating over the operator's signature that he has no orders for it. The issue of clearance cards must be authorized by Dispatchers in all cases, except that when lines are not working, they may be issued without such authority.

CLEARANCE CARD.

Dover, 9:15 A. M., March 25, 1887.
Conductor and Engineman No. 12:
I have no orders for your train. Signal is out for No. 16.
John Jones,
Operator.

This does not interfere with or countermand any orders you may have received.
Conductor must see that the number of HIS TRAIN is entered in the above form correctly.
Conductor and Engineman must each have a copy.

Operators must be prepared with other signals to use promptly if the fixed signal should fail to work properly.

Sema-phore. When a semaphore is used, the arm means red when horizontal and white when in an inclined position.

Report signal lamps not burning. Conductors and engine-men of all trains shall look for the signal at each office, know positively what it indicates, and be governed accordingly. In case of neither signal being displayed, or at night a signal lamp or lantern in position but not burning, they shall consider the same as a signal for orders and not pass the station without orders or a clearance. Such cases of absence of signal must be at once reported to the superintendent.

Call day operator. If a train is held at night at a station where there is no night operator, the conductor will call the day operator to get orders for him.

Running by signals. Every case of running by or non-observance of signal, must be at once reported to the Superintendent with number of train and engine, and other information necessary to place the responsibility.

Release ticket. The train order signal lamps must be lighted just before dark and kept burning until clear day-light in readiness for instant use.

On sight of a signal for orders, conductors and engine-men must go at once to the office to receive and respond to them.

No train or engine will start on its run or leave any district terminal station until the conductor and engine-man have inquired at the telegraph office for orders and received either special order or a release ticket. Release tickets will be in the following form, which the conductor will read and hand to the engineer:

Union Pacific Form 2641.

TRAIN RELEASE TICKET.

.....189.....M.
To Conductor and Engineman.....Section, Train No.....
NO ORDERS FOR YOU.

.....Operator.....Station.

NOTE.—For use of this ticket see Rule 524. At stations where conductors and engine-men are required

by Rule 524 to call for orders, when there are no orders for them and when no signal is out operators will issue this form instead of Clearance Ticket, as required by Rule 524.

The issue of train release tickets must be authorized by the Dispatcher in all cases, except when lines are not working; the operator may issue without such authority.

Report trains. **525.** Operators will promptly record and report to the Dispatcher the time of departure of all trains and the direction in which extra trains are moving. They will record the time of arrival of trains and report it when so directed.

Registering tickets. Freight conductors will fill out Registering Tickets in the following form, leaving one at every telegraph station where there is no train register, being particular to state if carrying signals or not.

TRAIN REGISTERING TICKET.

.....Section, Train No.....Engine No.....
Arrived at.....Station at.....M. Left at.....M.
Has.....Loads.....Empties. Carrying.....Signals.
From.....To.....Conductor.
.....189.....

NOTE.—Freight conductors will fill out and leave one of these tickets at each telegraph station, as required by Rule 525. Operators will forward such tickets to superintendent daily.

Designation of trains. **526.** Regular trains will be designated in orders by their schedule numbers, as "No. 10 (ten)" or "Second No. 10 (ten)"; extra trains by engine numbers, as "Extra 798 (seven, nine, eight)"; all numbers in the body of orders to be written in figures and words. The direction of the movement of extras will be added when necessary; as "East" or "West." Example:

"No. 17 (seventeen) will wait at until 12:30 (twelve thirty) P. M. for No. 4 (four)."

Signs and Abbreviations. **527.** The following signs and abbreviations may be used:

Initials for Superintendent's signature.
Such office and other signals as are arranged by the Superintendent.

C & E— for Conductor and Engineman.
O K—as provided in these rules.

Min—for Minutes.
Junc—for Junction.
Frt—for Freight.
No—for Number.

Eng—for Engine.
Sec—for Section.
Opr—for Operator.

9—to clear the line for Train Orders, and for Operators to ask for train orders.

31—for Train Order as provided in the rules.
The usual abbreviations for the name of the months and stations.

FORMS OF TRAIN ORDERS.

FORM A.—FIXING MEETING POINTS FOR OPPOSING TRAINS.

— and — will meet at —

EXAMPLES.

No. 1 (one) and No. 2 (two) will meet at Bombay.
No. 3 (three) and 3d, No. 4 (four) will meet at Stam.

No. 5 (five) and extra 95 (ninety-five) will meet at Hong Kong.

Extra 652 (six, fifty-two) East and Extra 231 (two, thirty-one) West will meet at Yokohama.

Trains receiving this order will, with respect to each other, run to the designated point, and having arrived there will pass in the manner provided by the rules.

FORM B.—AUTHORIZING A TRAIN TO RUN AHEAD OF OR PASS ANOTHER TRAIN RUNNING IN THE SAME DIRECTION.

(1) — will pass — at —
(2) — will run ahead of —, from — to —

EXAMPLES.

(1)—No. 1 (one) will pass No. 3 (three) at Khar-toum.

(2)—No. 4 (four) will run ahead of No. 6 (six) from Bengal to Madras.

When under this order a train is to pass another, both trains will run according to rule to the designated point and there arrange for the rear train to pass promptly.

FORM C.—GIVING A TRAIN OF INFERIOR RIGHT THE RIGHT OF TRACK AGAINST AN OPPOSING TRAIN OF SUPERIOR RIGHT.

[NOTE.—This form of order must not be used when Form A can be used.]

— has the right of track against — to —

EXAMPLES.

(1)—No. 2 (two) has right of track against No. 1 (one), Mecca to Mirbat.

(2)—Extra 37 (thirty-seven) has right of track against No. 3 (three), Natal to Ratlan.

[NOTE.—The terms "superior right" and "inferior right," here and elsewhere in these rules, refer to the rights of trains under the time-table and train rules, and not to rights under special orders.]

This order gives a train of inferior right the right of track against one of superior right, to a designated point.

If the trains meet at the designated point, the train of inferior right must take the siding, unless the rules or orders otherwise indicate.

Under this order, as illustrated by example (1), if the train of superior right reaches the designated point before the other train arrives, it may proceed, provided it keeps clear of the schedule time of the train of inferior right as many minutes as the inferior train was before required by the train rules to keep clear of the superior train.

If the train of superior right, before meeting, reaches a point beyond that named in the order, the conductor must stop the other train where it is met and inform it of his arrival.

Under example (2) the train of superior right cannot go beyond the designated point until the extra train arrives.

When the train of inferior right has reached the designated point, the order is fulfilled, and the train must then be governed by time-table and train rules or further orders.

The following modification of this form of order will be applicable for giving a work train the right of track over all other trains, in case of a wreck or break in the track.

EXAMPLE.

Work Train extra 275 (two seventy-five) has right over all trains between Stockholm and Edinburgh from 7 (seven) P. M.

This gives the work train the exclusive right of the track between the points designated.

FORM D.—GIVING ALL REGULAR TRAINS THE RIGHT OF TRACK OVER A GIVEN TRAIN.

All regular trains have right of track against — between — and —.

EXAMPLE.

All regular trains have right of track against No. 1 (one) between Moscow and Berlin.

This order gives to any regular train of inferior right receiving it the right of track over the train named in the order, and the latter must clear the schedule times of all regular trains, the same as if it were an extra.

FORM E.—TIME ORDERS.

[NOTE.—This form of order must not be used when Form A can be used.]

(1) — will run — late from — to —
(2) — will wait at — until — for —

EXAMPLES.

(1) No. 1 (one) will run 20 (twenty) min. late from Joppa to Mainz.

(2) No. 1 (one) will wait at Muscat until 10 (ten) A. M. for No. 2 (two).

Form (1) makes the schedule time of the train named, between the points mentioned, as much later as the time stated in the order, and any other train receiving the order is required to run with respect to this latter time, the same as before required to run with respect to the regular schedule time. The time in the order should be such as can be easily added to the schedule time.

Under Form (2) the train of superior right must not pass the designated point before the time given, unless the other train has arrived. The train of inferior right is required to run with respect to the

time specified, the same as before required to run with respect to the regular schedule time of the train of superior right.

FORM F.—FOR SECTIONS OF REGULAR TRAINS.

— will carry signals — to — for —

EXAMPLES.

No. 1 (one) will carry signals Astrakhan to Cabul, for Eng. 85, (eight-five).

2d No. 1 (one) will carry signals London to Dover for Eng. 90 (ninety).

This may be modified as follows:
Engine 70 (seventy), 85 (eighty-five), and 90 (ninety), will run as 1st, 2d and 3d sections of No. 1 (one), London to Dover.

For annulling a section:
Eng. 85 (eighty-five) is annulled as second section of No. 1 (one) from Dover.

If there are other sections following add:
Following sections will change numbers accordingly.

The character of train for which signals are carried may be stated. Each section affected by the order must have copies, and must arrange signals accordingly.

FORM G.—FOR ARRANGING A SCHEDULE FOR A SPECIAL TRAIN.

Eng. — will run as special — train, leaving — on — on the following schedule, and will have the right of track over all trains.

Leave —
Arrive —

EXAMPLES.

1. Eng. 77 (seventy-seven) will run as special passenger train leaving Turin on Thursday, Feb. 17th (seventeenth), on the following schedule, and will have the right of track over all trains.

Leave Turin 11:30 P. M.
Pekin 12:25 A. M.
Canton 1:47 A. M.

Arrive Rome 2:22 A. M.

Example 1 may be varied by specifying particular trains over which the special shall or shall not have right of track, and any train over which the special train is thus given the right of track must clear its time as many minutes as such train is required to clear the schedule time of a first-class train.

EXAMPLES.

2. Eng. 75 (seventy-five) will run as special passenger train, leaving Geneva Thursday, Feb. 17th (seventeenth), with the rights of a first class train east on the following schedule, which is a supplement to Time table No. 10 (ten).

Leave Geneva 10 A. M.
Pekin 10:30 A. M. passing No. 12 (twelve).

Canton 11 A. M. meeting No. 7 (seven).
Arrive Athens 11:30 A. M.

Example 2 will be in each case a temporary supplement to the current Time-table, and the designation of meeting and passing points is to be taken as the same as such designation by full faced type on the Time-table, and the rules are to govern in the same way.

Form H—Extra Trains.

—will run extra from — to —

EXAMPLE.

(a.) Eng. 99 (ninety-nine) will run extra from Berber to Gaza.

A train receiving an order to run extra is not required to guard against opposing extras, unless directed by order to do so, but must keep clear of all regular trains as required by rule.

A "work train" is an extra for which the above form will be used for a direct run in one direction. The authority to occupy a specified portion of the track, as an extra while working, will be given in the following form.

(b.) Eng. 292 (two, ninety-two) will work as an extra from 7 (seven) a. m. until 6 (six) p. m. between Berne and Turin.

The working limits should be as short as practicable, to be changed as the progress of the work may require. The above may be combined, thus:

(c.) Eng. 292 (two, ninety-two) will run extra from Berne to Turin and work as an extra from 7 (seven) a. m. until 6 (six) p. m. between Turin and Rome.

When an order has been given to "work" between designated points, no other extra must be authorized to run over that part of the track without provision for passing the work train.

When it is anticipated that a work train may be where it cannot be reached for meeting or passing orders, it may be directed to report for orders at a given time and place, or an order may be given that it shall clear the track for a designated extra, in the following form:

(d.) Work Train 223 (two, ninety-two) will keep clear of Extra 223, (two, twenty-three) East, between Antwerp and Brussels after 2:10 (two ten) p. m.

In this case, extra 223 (two, twenty-three) must not pass either of the points named before 2:10 p. m., at which time the work train must be out of the way between those points.

When the movement of an extra train over the working limits cannot be anticipated by these or other orders to the work train, an order must be given to such extra, to protect itself against the work train in the following form:

(e.) Extra 76 (seventy-six) will protect itself against work train extra 95 (ninety-five) between Lyons and Paris.

This may be added to the order to run extra.

A work train when met or overtaken by an extra must allow it to pass without unnecessary detention.

When the conditions are such that it may be considered desirable to require that work trains shall at all times protect themselves while on working

limits, this may be done under the following arrangements. To example (b) add the following words

(f.) *protecting itself against all trains.*

A train receiving this order must, whether standing or moving, protect itself within the working limits (and in both directions on single track) against all trains, in the manner provided in Rule 99.

When an extra receives orders to run over working limits it must be advised that the work train is within those limits by adding to example (a) the words

(g.) Eng. 292 (two, ninety-two) is working as an extra between Berne and Turin.

A train receiving this order must run expecting to find the work train within the limits named.

Form J—Holding Order.

Hold —

EXAMPLES.

(1.) Hold No. 2 (two).

(2.) Hold all trains east.

As any order for which "O. K." has been given and acknowledged operates as a holding order for the train to which it is addressed, this form will only be used in special cases, to hold trains until orders can be given or for some other emergency. The reason for holding may be added, as "for orders."

This order is not to be used for holding a train, while orders are given to other trains against it, which are not at the same time given to it in duplicate. It must be respected by conductors and engine-men of trains thereby directed to be held as if addressed to them. Conductors when informed of the order must sign for it, and their signatures must be sent and "complete" obtained.

When a train has been so held it must not go until the order to hold is annulled, or an order is given in the form:

"— may go."

This must be addressed to the person or persons to whom the order to hold was addressed and must be delivered in the same manner.

Form K—Annuling a Schedule Train.

—of — is annulled.

EXAMPLES.

(1.) No. 1 (one) of Feb. 29th (twenty-ninth) is annulled.

(2.) No. 3 (three) due to leave Naples Saturday, Feb. 28th (twenty-eighth), is annulled.

Adding "from Alaska" or "between Alaska and Halifax," when appropriate.

This order takes away all rights of the train annulled and authorizes any train or person receiving it to use the track as if the train annulled were not on the time table.

If a train is annulled to a point named, its rights beyond that point remain unaffected.

The Train Dispatcher may direct any operator to omit repeating back an order annulling a train until he has occasion to deliver it.

When a train has been annulled it must not be again restored under its original number by special order.

Form L—Annuling or Superseding an Order.

"Order No. — is annulled."

This will be numbered, transmitted and signed for as other orders.

If an order which is to be annulled has not been delivered to a train, the annulling order will be addressed to the operator, who will destroy all copies of the order annulled but his own, and write on that:

Annulled by Order No. —

An order superseding another may be given, adding "this supersedes order No. —," or adding "instead of —."

EXAMPLE.

No. 1 (one) and No. 2 (two) will meet at Sparta, instead of at Thebes.

An order which includes more than one specified movement must not be superseded.

An order that has been annulled or superseded must not be again restored by special order under its original number.

In the address of an order annulling or superseding another order, the train first named must be that to which rights were given by the order annulled or superseded, and when the order is not transmitted simultaneously to all concerned, it must be sent to the point at which that train is to receive it and the required response first given, before the order is sent for other trains.

CONCERNING AIR-BRAKES.

1. In making up trains, all couplings must be united so that the brakes will apply throughout the whole train. The cocks in the brakelike must all be opened (handles pointed down), except that on the rear of the last car, where hose coupling must be coupled to dummy coupling and cock closed (handle up.)

In detaching engines or cars, the couplings must invariably be parted by hand (and not pulled apart); the cocks in the main brake-pipes must always be closed before separating the couplings, to prevent application of the brakes. Before detaching the engine or any cars, the brakes must be fully released on the whole train.

In moving cars when air brakes are not being used, hose couplings must be coupled to dummy couplings.

2. For the automatic brake the handle of the four-way cock must be turned horizontally; if turned down, it will be changed to the simple air-brake; if turned midway between these two positions, it will cut the brake out, and should be so turned when desirable to have the brakes out of use on any particular car.

3. Car inspectors will, in cold weather, frequently drain triple valve, and see that brake cylinders are cleaned and oiled at least once in three months, and

often necessary, and date of some marked on cylinder with chalk. Conductor's valve must be kept tight and must be examined by car inspectors.

4. If the brakes are applied, when the engine is not attached to the train, or car, they can be released by opening the release cock.

5. All trainmen are required to familiarize themselves with the method of operating the air-brake, particularly as to releasing them when brakes stick, or are applied by bursting of pipe, hose, or otherwise, causing accidental stoppage of train.

Engine-men upon finding that the brakes have been applied, must at once aid in stopping the train by turning the handle of the brake valve toward the right so as to maintain the pressure in main reservoir; if the gauge shows that all the air has escaped, they will know that the pipe or hose has burst or that the conductor's valve has been opened and held open. If pressure is only reduced sufficiently to apply brakes, and reduction then ceases, he will know that conductor's valve has been opened long enough to cause stoppage of train and then closed. In this case he can easily release the brake in the usual way, on receiving signal from the conductor.

6. The conductor's valve must only be used in cases of emergency, when it should be held open to allow air to escape, until train is brought to a stand.

7. When brakes have been applied in such a manner that they cannot be released from the engine, the engine-man should warn the trainmen by two short blasts of whistle, given three times (see Rule 50 a) and upon stoppage of train the rear brakeman will immediately go back the proper distance to protect the rear of the train, without attempting to release any brakes.

The conductor, after seeing that the rear of train has been protected, will release as many brakes as he can, beginning at the rear. The fireman will release as many as he can, beginning at the tender. The head brakeman will begin about one-third the distance from the engine and release brakes toward the rear of the train until he meets the conductor. As soon as the brakes are released the train may proceed, depending upon hand brakes in case of failure of air. All the brakes on an average train can be released in about one minute if each employe attends to his duties as designated herein.

8. When the train is brought to a full stop, it is the duty of brakemen to examine each car to see that every brake is released. If a brake is found applied which the engine-man cannot release from the engine, it may be cut out, as per Rule 2. Brake on rear car in train should not be cut out when possible to avoid it.

9. In setting out cars, the air should be fully released and hand-brakes used.

10. Engine-men will be held responsible for the proper workings of the air brakes, and must report on

arrival at terminal stations any failure or defect, and must know that they are in perfect working order before starting out on their runs.

The Air-Brake must be tested by applying and releasing the brake from the engine before starting from terminal stations, and at all other places where engines or cars have been detached or hose couplings separated. Brakemen will carefully watch such tests and report any failure.

11. Brakemen will carefully watch the action of brakes at all stops, and report sliding of wheels, (if any) to engine-man, who must govern himself accordingly.

12. The pump must be constantly run, but not faster than is necessary to maintain 70 pounds pressure for passenger, and 60 to 65 pounds for freight trains. Engine-men will be held responsible for the sliding of wheels, and must in no case carry excessive pressure.

13. Engine-men when applying the brakes must not use the full pressure of air except in cases of emergency.

For ordinary stops, air must be applied lightly by opening the valve and closing it gently when the pressure has been reduced from four to eight pounds on the gauge, and at a sufficient distance to enable them to stop the train without discomfort to passengers, sliding the wheels or injury to the machinery of the train. The brakes are fully applied when the pressure shown on the gauge has been reduced twenty pounds; any further reduction is a waste of air.

14. In making a stop, it is important to make as few applications of the brake as possible. If more than two are made, some of the brakes are likely to stick.

15. If Engine-man feels that some of the brakes are not released, he should put his brake valve at lap and pump up ten or fifteen pounds more air in the main reservoir and throw it on the train, which will release all brakes.

16. In releasing brakes the handle of the brake valve must be moved quite against the stop and be kept there for ten or fifteen seconds, and then moved back against the intermediate stop, which is the feed position, and where it must remain while the train is running, excepting on down grades, when after using the brakes some distance, the pressure has been reduced; in order to restore the pressure quickly, the handle of the brake valve must be left in the releasing position; this gives a full opening from the main reservoir to the train.

If greater time for re-charging is necessary, reduce the speed of the train.

17. When the grades will permit, the brakes on passenger trains should always be released before coming to a full stop thereby avoiding the sudden

action of the cars, which is extremely annoying to passengers and injurious to cars.

18. The handles of the "pressure retaining valve," at the end of each car, must be turned horizontally before descending continuous, heavy grades. The valve in this position retains a pressure of ten pounds in brake cylinder, which partly controls train while brake is being released and recharged; on reaching the foot of the grade the handles must be turned down, allowing the pressure to escape freely. And they should always be kept in this position on short or slight grades and level track. Particular attention must be given to see that the handles of these valves are in proper position at all times.

19. When double headers are run, air brakes should be used by head engine-man alone; second engine-man should close stop cock in train pipe under his valve, or in the absence of this stop cock, he should place engine-man's valve in the "lap" position in order to give forward engine-man complete control of the brakes.

Second engine-man will also keep his air pump working, and thus have pressure ready for any emergency, such as failure of pump on forward engine; in which case, forward engine-man proceeds as second engine-man would in above. The second engine-man having assumed control of the brakes, should retain charge of same until the end of the trip, except in case of necessity which may again reverse the operation.

Where helpers are used only for a short distance, regular engine-man of train will keep charge of and be responsible for proper handling of brakes.

20. When on mountain grades it should always be borne in mind that train must be kept well under control; descending at high speed should not be practiced with any train, as some part of the machinery may fail, and while practicable to control speed with hand brakes at eight to ten miles per hour, it may be impossible at twenty to thirty miles per hour to regain its control. No experiments should be made with the brakes when on mountain grades. The following essential points should be observed in holding a train of air brake cars while descending heavy grades.

1st. Train should be charged with maximum pressure before bringing brakes into use.

2nd. Force of brakes should be regulated so as to maintain a regular and steady speed of train, also make as long a distance as possible to each application of the brakes; by doing this the pressure is used economically and the pump is given more time to accumulate the necessary pressure for recharging.

3rd. Brake valve should be kept in releasing position while recharging, thereby giving the brakes the greatest advantage in recharging quickly.

4th. Use every effort to restore full amount of pressure consumed in previous application before making new application of brakes.

5th. Reduce pressure, as shown on gauge, not more than 15 to 20 pounds from one recharging to another, otherwise it will be difficult to replenish the full amount in so short a time.

21. Driver brakes should be applied gradually in order not to bring a too sudden strain on the brake rods and lever. Engine should not be reversed when driver brakes are set, as the effects would be to lock and slide the wheels.

22. When the number of air-brakes in train are insufficient, hand brakes next to and back of air-brakes should be used. If hand brakes at rear end of train and air brakes at forward end are used, and air brakes are released before first releasing hand brakes, the slack will run out, and train would probably break apart. By using all brakes at forward end slack will always remain together back of hand brakes, even if air brakes are released first.

23. Engineman should always have on engine, one extra hose for connection between engine and tender, and one for connection between tender and car. Defects in air brakes should be reported to Superintendent, by telegraph, giving number and initial of car and nature of defect.

Trainmen must watch train closely while in motion, and pay special attention to wheels sliding and

brakes sticking, and report such cases to engineman at once; they should also see that when pressure retaining valves are used, the handles are all turned down as soon as bottom of grade is reached. They should be on the alert at all times, and ready to respond quickly in case of any emergency which might arise that would necessitate the prompt use of the hand brake.

CONCERNING BAKER HEATERS.

To insure satisfactory results in the use of the heater, the following instructions must be strictly observed:

1. The heater should be kept half full of coal at all times. The coal should never be allowed to get below the top of worm. This will give about fifteen inches of fire.

2. The inside safety lid should never be opened except to build the fire or put in coal. (Never force the fire by opening inside safety lid.)

3. To increase the heat, open inside lower damper, and close upper damper.

4. To reduce the heat, close the lower damper and open the upper damper about two inches, or according to amount of heat required. With both dampers closed the car will not be too warm at any time, and by proper working of the lower and the upper damp-


ers, and watching the indicator, the car can be kept at any temperature desired.

5. Failure of the heater arises from neglect or mismanagement, generally from allowing fires to run too long without putting in coal, then filling them full and operating the drafts, producing a rapid fire, which instead of warming the car, stops the circulation, and creates gases, which are liable to explode.

6. It will be readily understood that with the large amount of piping in the cars, the circulation (which is principally caused by the weight of the column of water falling from the drum into the pipes, and the difference in the weight of a column of cold and hot-water), must be necessarily slow, and that a forced fire will do no good, but will only cause the effect mentioned above.

7. In filling the heater pipes, be sure that the water contains all the salt it will hold in solution, and that no undissolved salt enters the drum. Open the combination cock on end of drum and pour in water until it runs freely from same. The water should always stand at the height of combination cock, which may be tried by opening the cock, but only when the fire is very low and no pressure on. Pipes should be warm all round before passengers enter the car.

8. Passenger cars having Baker heaters must be turned so that heater will be in forward end of car when practicable.

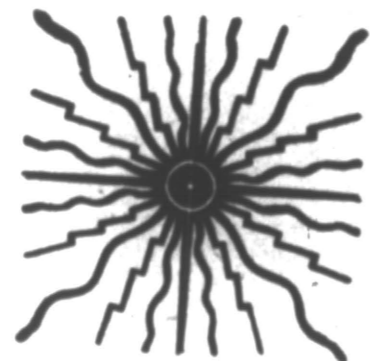

MILEAGE.

IDAHO DIVISION.

First District	Granger to Montpelier	115.1
Second District	Montpelier to Pocatello	99.3
Third District	Pocatello to Glenn's Ferry	100.9
Fourth District	Glenn's Ferry to Huntington	186.9
Fifth District	Sacabone to Ketchum	69.4
Boise District	Nampa to Boise	19.8
Total Idaho Division		680.5
		680.5

MONTANA DIVISION.

Sixth District	Ogden to McCammon	111.1
Cache Valley Branch	Cache Jct. to Preston	42.2
Seventh District	Pocatello to Lima	145.1
Eighth District	Lima to Silver Bow	110.4
Total Montana Division		408.8
		408.8

UTAH DIVISION.

First District	Ogden to Juab	138.8
Second District	Juab to Frisco	186.1
Ogden & Syracuse District	Syracuse Jct. to Syracuse	5.8
Utah & Nevada District (N. G.)	Salt Lake City to Terminus	87.1
	Saltair Jct. to Saltair	2.5
	Lehi Jct. to Bureka	55.1
	Ironton to Tintic	8.5
	Mammoth Jct. to Mammoth	1.6
	Silver City Jct. to N. Spy Mine	4.9
Total Utah Division		385.4
		385.4
Total O. S. L. R. R.		1,424.7